

MITSUBISHI ELECTRIC HYDRONICS & IT COOLING SYSTEMS S.p.A.

IT COOLING

CHILLERS

i-FR-G05-Z AIR COOLED CHILLERS WITH INVERTER SCREW COMPRESSORS, FROM 477 TO 1697 kW



r R513A

INVERTER TOTAL
TECHNOLOGY

i-FR-G05-Z

THE GREEN FULL INVERTER CHILLER SUITABLE FOR YOUR DATA CENTER



Air cooled chiller with inverter screw compressors for outdoor installation from 477 to 1697 kW

i-FR-G05-Z is the new air cooled chiller with inverter screw compressors dedicated to data center environments. Thanks to the variable speed technology applied on both the compressors and fans, i-FR-G05-Z ensures top-level energy

efficiency values and complete dependability. Optimized to work with high temperature IT environments, the chiller's outstanding performance brings to significant PUE reduction and helps to keep the OPEX under control.

QUICK&EASY INSTALLATION AND MAINTENANCE




A vast array of already mounted options together with a smart unit design for quick and easy installation and maintenance operations.

HIGH DEGREE OF CONFIGURABILITY



Always the right solution for every project thanks to many specifically developed versions and a bespoke list of options (e.g. the integrated hydronic modules, several water flows controls).

EXTENDED OPERATING RANGE



Wide operating range, working with outdoor air temperatures from -20°C up to +55°C thanks to specifically developed options and smart control logics.

LEADING INVERTER TECHNOLOGY

The new i-FR-G05-Z showcases the latest variable speed technology applied on:

- ✓ dual screw compressors with integrated refrigerant cooled inverter motor and variable Vi technology
- ✓ high efficiency variable speed fans
- ✓ integrated variable speed hydronic modules (opt.)

COMPLETE RANGE OF CHILLERS

K	K efficiency	EER: 3,25	SEPR HT: 5,59 up to: 5,84
K +EC fans	K efficiency	EER: 3,27	SEPR HT: 5,72 up to: 6,02
A	High efficiency	EER: 3,58	SEPR HT: 5,86 up to: 6,10

EER conditions: evap. 26/18°C, air 35°C - SEPR HT according to the Regulation (EU) N.2281/2016

ACOUSTIC VERSIONS

-	Standard	Unit with standard compressor's enclosures.	Baseline
		Unit with noise reducer kit (Opt. 2315).	-3 dB(A)
SL	Super low noise	The highest level of noise reduction which cuts noise emissions down to -9dB(A), without compromising the unit's efficiency.	-9 dB(A)

HEAT RECOVERY CONFIGURATIONS

-	Standard unit	Unit for the production of chilled water.	-
D	Partial heat recovery	A desuperheater on the compressor discharge line recovers approximately 20% of the unit's capacity. Suitable for DHW production or other secondary uses, such as the integration of an existing boiler.	60°C
R	Total heat recovery	A devoted refrigerant water heat exchanger recovers all the condensation heat. Suitable for DHW production or air treatment in applications with AHU.	up to 60°C

ALL-ROUND SUSTAINABILITY



i-FR-G05-Z is the result of Mitsubishi Electric Hydronics & IT Cooling Systems' extensive approach to sustainability.

Increasing concerns about the global warming impact of chillers and heat pumps is driving new regulatory policies to push towards even more efficient units with the lowest carbon footprint.

Today, an all-round approach is the only way to effectively reduce the Total Equivalent Warming Impact (TEWI).

Fully committed to support the creation of a greener tomorrow, Mitsubishi Electric Hydronics & IT Cooling Systems designed i-FR-G05-Z, a complete chiller range with reduced environmental impact, optimized for R513A refrigerant.

Combining brilliant annual efficiency with the use of a low GWP refrigerant, i-FR-G05-Z tackles both the indirect (due to primary energy consumption) and the direct global warming, thus resulting in the perfect choice for any new, forward-looking cooling system.



LOW GWP

-56% GWP vs R134a



Non-flammable

Safety Class A1

REFRIGERANT BENCHMARK

SCROLL			SCREW		
Refrigerant	GWP*	Flammability**	Refrigerant	GWP*	Flammability**
R410A	2088	NON flammable	R134a	1430	NON flammable
R32	675	MILDLY flammable	R513A	631	NON flammable
R454B	466	MILDLY flammable	R1234ze	7	MILDLY flammable
R452B	698	MILDLY flammable	R1234yf	4	MILDLY flammable

*IPCC AR4 **ASHRAE 34 - ISO 817

New regulations like the EU F-gas and the Kigali Amendment to the Montreal Protocol, are driving the industry towards new eco-friendly refrigerants, with reduced greenhouse effect.

Unfortunately, the majority of low GWP refrigerants raises another critical issue: flammability.

The new refrigerant R513A, chosen for i-FR-G05-Z, is a brilliant exception: it offers a -56% GWP reduction compared to R134a's while ensuring complete non-toxicity and non-flammability (Class A1 of ASHRAE 34, ISO 817).

PROFOUND EXPERTISE



With thousands of units installed worldwide since 2003, Climaveneta air-cooled screw chillers have evolved into the third generation: i-FR-G05-Z series. The highest manufacturing quality, proven reliability, and full configurability are the reasons behind the success of this range. Today i-FR-G05-Z combines extensive expertise with the latest technology to deliver you the best value.

TOP-LEVEL PERFORMANCE




Fully customizable with a range of versions and accessories, i-FR-G05-Z allows custom-made application design for individual projects. Thanks to devoted technological solutions and accurate design, each i-FR-G05-Z configuration brings high full load performance and brilliant part load efficiency together, thus helping individuals and businesses reduce the energy consumption of their HVAC systems and cut their running costs.



FULL INVERTER TECHNOLOGY



HIGHER ENERGY EFFICIENCY

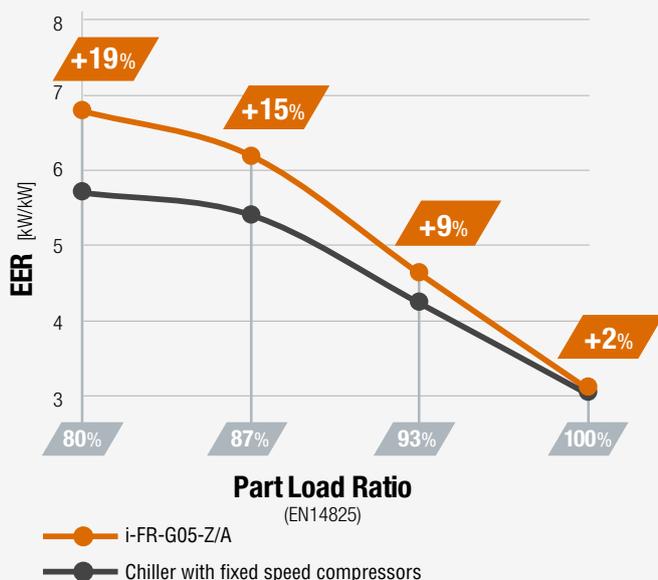

The increase in efficiency compared to high efficiency ErP 2018 compliant fixed speed units is expressed by drawing the EER trend to the conditions defined by the ErP directive 2009/125 /EC necessary for the calculation of SEPR HT seasonal parameters.

ErP 2021 COMPLIANT




IT environments are usually characterized by high thermal loads, all year round.

Even in high load profile applications, i-FR-G05-Z ensures significant efficiency improvement compared to traditional fixed speed compressor units.



ABSENCE OF IN-RUSH CURRENTS

The inverter technology involves a start-up phase with very low in-rush current. The frequency converters chosen by Mitsubishi Electric are characterized by values of Displacement Power Factor of between 0,97 and 0,99.

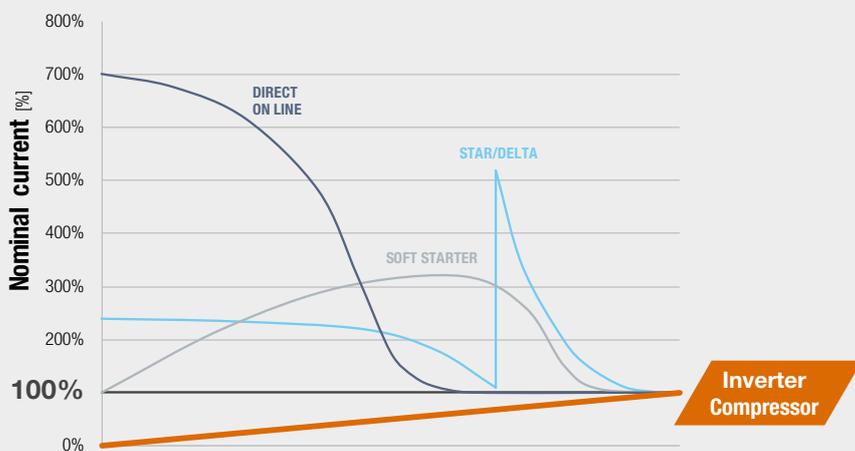

No electrical and mechanical stress

The unit never exceeds the nominal current, not even when starting up.


No additional equipment needed

Such as star/delta commutators or soft starters in order to reduce the in-rush currents.

The new i-FR-G05-Z chillers apply variable speed technology in all of its main components, achieving top-level performances in any load condition.



REDUCED SOUND POWER LEVELS

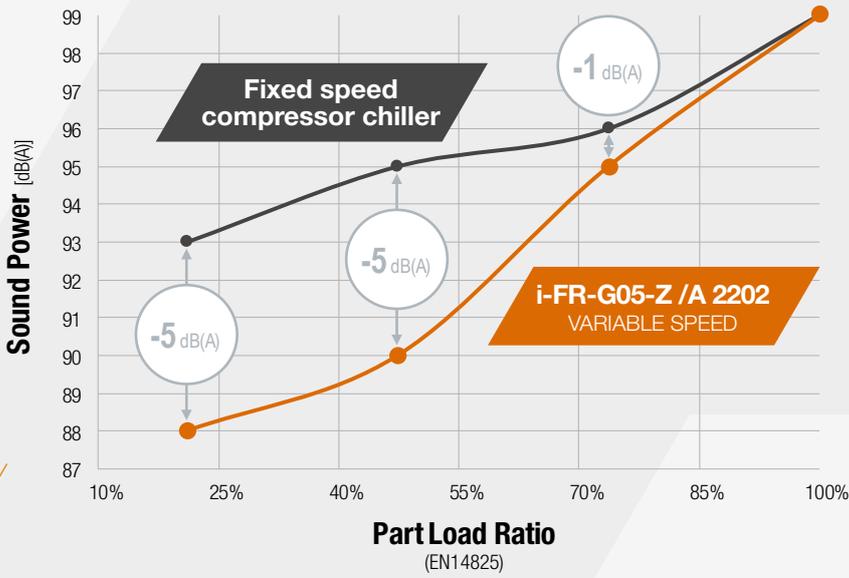

LOWER SPEED, LOWER NOISE

The unit working in partial loads is far more silent than a fixed speed compressor unit.

In applications with units working at part load for most of the year, i-FR-G05-Z ensures extremely low noise operations down to -5 dB(A).


Ideal for sound sensitive environments located nearby

- ✓ Offices
- ✓ Meeting Rooms



FLEXIBLE SELECTION

The smart design of the units combined with the ELCAWorld selection software allows you to always choose the right unit for every project, prioritizing efficiency, additional future plant demands or reducing the initial investment and the footprint.

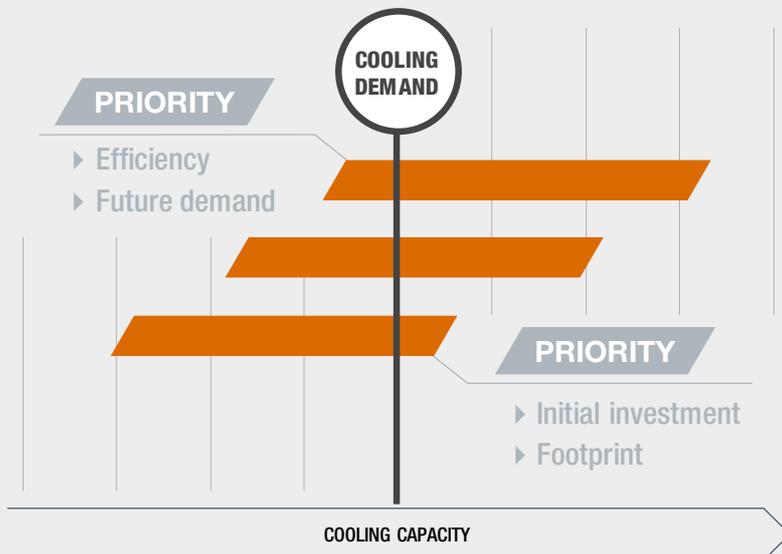

Choose YOUR target

-  EFFICIENCY
-  INITIAL INVESTMENT
-  FOOTPRINT
-  FUTURE PLANT DEMANDS

TECHNOLOGICAL CHOICES

W3000TE CONTROL

Fully in-house developed management software.

- ▶ Efficient and reliable operation in all conditions
- ▶ Connectivity with the most commonly used BMS protocols (Opt.)

KIPLink USER INTERFACE

Innovative Wi-Fi interface for an easy and enhanced unit management.



Built-in pump group (Opt.)

Factory-mounted pumps and pre-plumbed hydraulic components, for minimum on-site installation time, work, and cost.

- ▶ Fix speed and variable speed pumps available, with low or high head
- ▶ Electronic primary flow controls for constant pressure or constant temperature

Casing

Base and frame made of hot-galvanized steel, all parts polyester-painted.

- ▶ Easy access to all inner components
- ▶ Simple transport, lifting, and handling
- ▶ Total weather resistance

Refrigerant circuits

One independent refrigerant circuit per compressor, to grant reliability and easy maintenance. Compressor enclosures are supplied as standard in all versions.

Variable speed fans


New generation AC and EC fans for precise airflow management and reduced power consumption.

i-FR-G05-Z / K versions

High performing axial fans equipped with autotransformer for speed adjustment


i-FR-G05-Z / A versions

High performing EC fans, for higher efficiency and continuous speed modulation

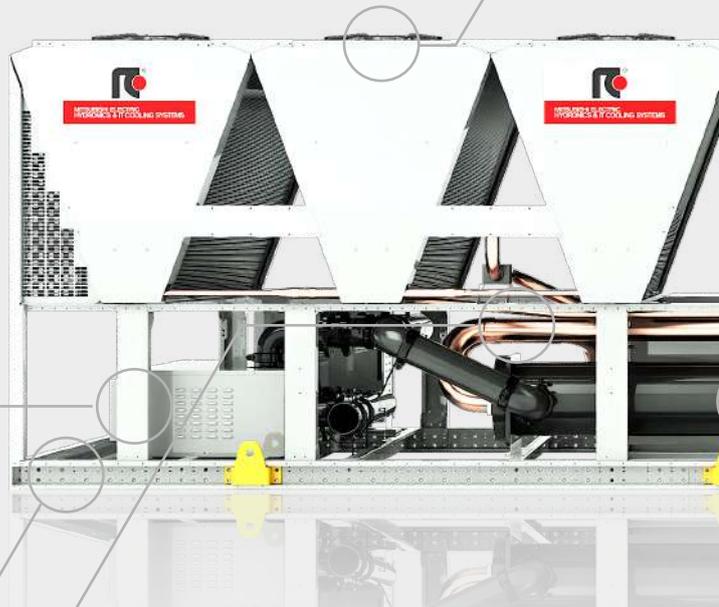

CSCV Compressors

Inverter, Variable Vi dual rotor screw compressors, designed according to Mitsubishi Electric Hydraulics & IT Cooling Systems specifications and for its' exclusive use.

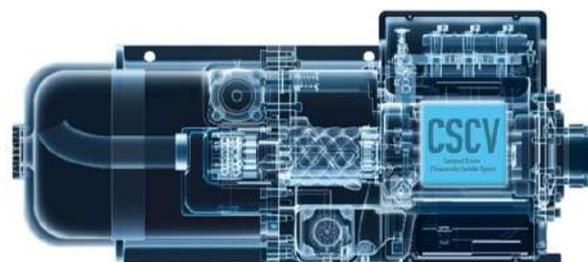

Trusted reliability, simplified installation, maximized performance: i-FR-G05-Z improves the already high performance of the fixed speed chiller range adding new exceptional features.



Low GWP refrigerant

New generation refrigerant with reduced greenhouse effect. Non-flammable.

R513A GWP_{100 year} = 572
(R134a GWP_{100 year} = 1300)
GWP values according to IPCC AR5

Non-toxic, non-flammable

ASHRAE 34, ISO 817: A1 class

Favorable physical properties

Same cooling capacity delivered as R134a
Same operating pressures as R134a

In line with standard building codes

No special equipment
No need for flammable risk assesment
No extra costs


Compliant with eco regulation objectives

No future retrofit required
Reduced price volatility

Micro-channel coils

New generation full aluminum micro-channel coils, ideally positioned on a "V" block structure to optimize airflow and heat transfer.

- ▶ Up to 30% of refrigerant charge reduction vs. traditional tube and fin coils.
- ▶ Long Life Alloy (LLA) for higher corrosion resistance and longer life cycle
- ▶ Protective coating available for harsh industrial and marine environments (Opt.)

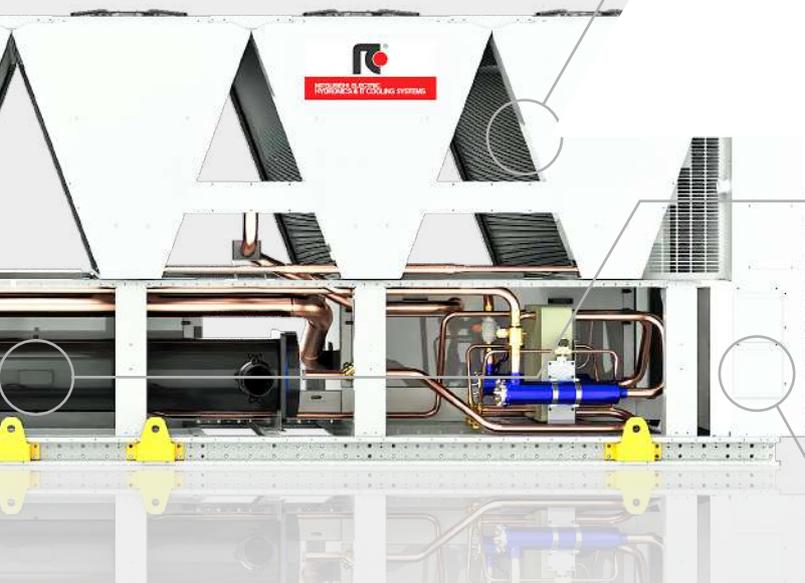

Shell and tube evaporator

Dry expansion, single pass shell and tube evaporator, fully developed by Mitsubishi Electric Hydronics & IT Cooling Systems.

- ▶ Internally grooved copper tubes for enhanced heat exchange
- ▶ Low pressure drops
- ▶ Fully protected against ice formation

Electrical panel

Large electrical panel with power circuit components and control main board.

- ▶ Forced-air cooling system

SMART VARIABLE Vi LOGIC

Variable Speed Drive

Integrated and compact frequency converter, refrigerant cooled, for outstanding seasonal efficiency and wide capacity regulation.

Automatic internal volume ratio adaption


Obtained thanks to an integrated Vi slider which adapts the internal geometry to the current operating condition, thus ensuring the best efficiency.

Extra durability achieved thanks to dedicated components:

- Envelope control function, 3-stage warning and alarm system, safe-torque-off function.
- Carbon steel bearings granted for a lifetime of over 150.000 hours.

High efficiency high speed motor

For unprecedented full and part load efficiencies and extremely wide and accurate capacity regulation.

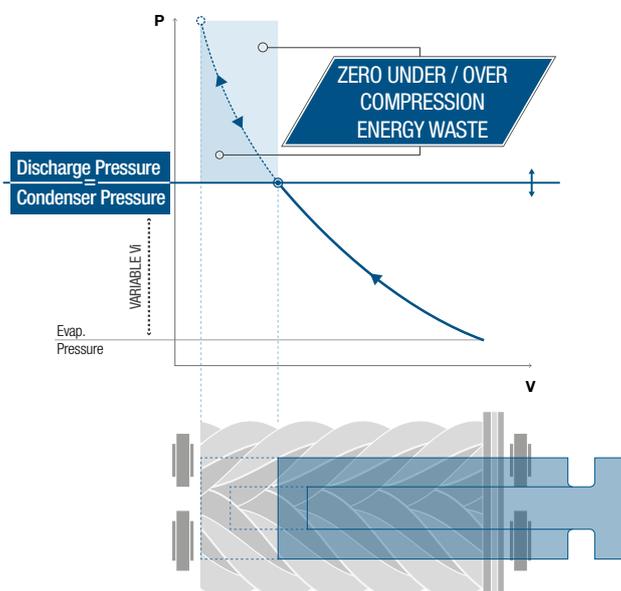

CORE FEATURES FOR ALL YOUR EQUIPMENT NEEDS

W3000TE control and KIPLink innovative interface

The logic behind i-FR-G05-Z is the W3000TE control software. Characterized by advanced functions and algorithms, **W3000TE features proprietary settings** that ensure faster adaptive responses to different dynamics, in all operating modes. Direct control over the unit comes through the innovative KIPLink interface.

Based on Wi-Fi technology, **KIPLink** gets rid of the standard keyboard and **allows one to operate on the unit directly from a mobile device** (smartphone, tablet, notebook).



Easier on-site operation

Monitor each component while moving around the unit for maintenance operations. View and change all parameters with easy-to-understand screenshots and dedicated tooltips.

Get devoted "help" messages for alarm reset and trouble shooting.



Real-time graphs and trends

Monitor the immediate labor status of the compressors, heat exchangers, cooling circuits, and pumps.

View the real-time graphs of the key operating variable trends.



Data logger function

View history of events and use the filter for a simple search.

Enhance diagnostics with data and graphs of 10 minutes before and after each alarm.

Download all the data for detailed analysis.

How to access the unit with KIPLink



Direct access to the W3000TE control is achieved by scanning the QR-code positioned on the front side of the i-FR-G05-Z unit.




The three-colour LED button positioned on the electrical board allows the user to switch the unit on/off and visualize the general status of the equipment without using any mobile device.

In addition (Opt. 1442, 1444) or in substitution (Opt. 6194, 6195) to the KIPLink, i-FR-G05-Z can be provided with: a 7" color touch screen interface or with a keyboard with large display and LED icons.

In these cases, the LED switch is not provided. Remote keyboard is possible (Opt. C9261063, C9261064, C926108911, C926108913).

EXTENSIVE OPERATING LIMITS

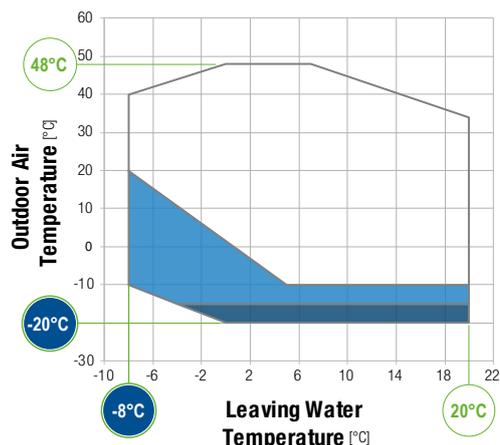

K VERSION (Standard)

FULL LOAD OPERATION

- Standard unit
- Required: EC fans (Opt. 808)
- Required: EC fans (Opt. 808)
Low temp. device DBA (Opt. 813)

Air temp. < -10°C
Double insulation on heat exchangers (Opt. 2631)

LWT < 0°C
Compressor liquid injection (Opt. 871)

EC fans (Opt. 808)
Maximum outside air temperature: 46°C

PARTIAL LOAD OPERATION

In case of higher outdoor air temperature, i-FR-G05-Z automatically partializes its resources to ensure uninterrupted operation (HPTC function).

Operating limits when working partialized (water *7°C):
up to 53°C

RC products have always been synonymous for best in class performance and high versatility. This is particularly true for i-FR-G05-Z, the innovative chiller where all the features have been designed for complete customer peace of mind.

Hydronic modules and flow controls

i-FR-G05-Z units come equipped as standard with terminal and modulating signal (0-10V) to control the activation and speed of one external variable speed pump, and with a parameter set constant water flow to set the pump speed. This latest arrangement is particularly useful during the installation and commissioning to adjust water flow and the pressure head according to the current plant characteristics.

Factory-mounted pump group

2 pumps (duty/standby) provide low or high head (available head approx. 100 or 200 kPa)

Fixed speed pumps

2 pump, 2-pole motor: Opt. 4711 (LH) / 4712 (HH)
2 pump, 4-pole motor: Opt. 4708 (LH) / 4709 (HH)

Variable speed pumps

2 pump, 2-pole motor: Opt. 4722 (LH) / 4723 (HH)
2 pump, 4-pole motor: Opt. 4719 (LH) / 4721 (HH)



Close-coupled pumps by Grundfos

Terminals for external pump control

The unit controls the activation and speed of 1 or 2 external pumps.

Terminals + Modulating signal

1 pump: Standard
2 pumps: Opt. 4714

These arrangements allow to control the activation / deactivation of fixed speed pumps too!

Other possible variable primary flow control logics:



VPF control logic

The VPF control series (Variable Primary Flow) doesn't only adjust the pump speed on the basis of the plant's thermal load, but also dynamically optimizes the unit's thermoregulation for variable flow operation, thus ensuring both the highest pump energy savings and chiller stable operation.

VPF: constant ΔP on the plant side

For systems with only the primary circuit.
Opt. 4864 or 4865 for single unit system, Opt. 4866 for multi-unit system


VPF.D: constant ΔT on the plant side

For systems with primary and secondary circuits separated by a hydraulic decoupler.
Opt. 4867 for single unit system, Opt. 4868 for multi-unit system

VPF.E: constant ΔT

For systems with only the primary circuit and terminals with bypass.
Opt. 4869

EXTENSIVE OPERATING LIMITS

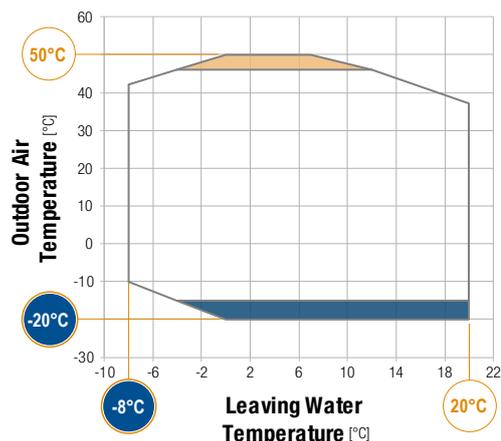

A VERSION (High Efficiency)

FULL LOAD OPERATION

- Standard unit
- Required: HT kit (Opt. 1955)
- Required: Low temp. device DBA (Opt. 813)

Air temp. < -10°C
Double insulation on heat exchangers (Opt. 2631)

LWT < 0°C
Compressor liquid injection (Opt. 871)

PARTIAL LOAD OPERATION

In case of higher outdoor air temperature, i-FR-G05-Z automatically partializes its resources to ensure uninterrupted operation (HPTC function).

Operating limits when working partialized (water *7°C):
up to 55°C

i-FR-G05-Z Energy Analysis

Rome, Data center

IT COOLING

Project

A medium-sized data center in Rome was considered for this energy analysis.


This project evaluated the significant increase in seasonal efficiency of the new i-FR-G05-Z inverter screw chillers compared to an already excellent high efficiency fixed speed compressor chiller.

This IT Cooling application emphasizes the benefits of the Inverter technology, ensuring exceptional results.



Temperature profile

Cooling load

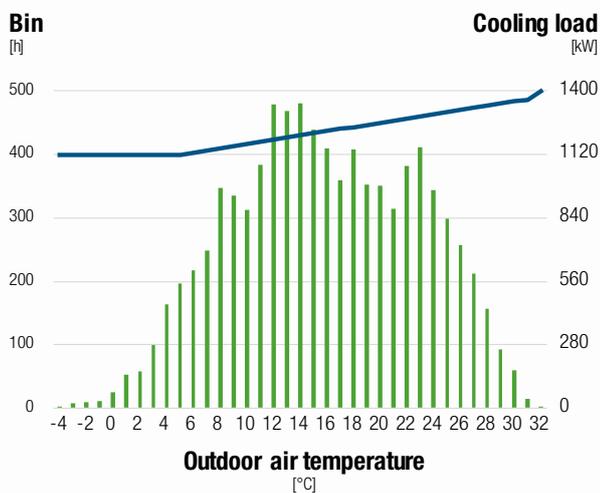

For cooling the data center, it has been considered a plant requiring a continuous cooling load 7 days a week, 12 hours per day.

As visible from the graph, for most of the hours the unit is working at high loads.

Energy analysis parameters:

Total of 3 units: 2 operating + 1 redundant
Operating schedule: 7 days/week, continuous operation
Cold water set point: 26/18°C **Electric energy cost:** 0,13 €/kWh
Interest rate: 6% **Inflation rate:** 3%

i-FR-G05-Z/A vs High efficiency chiller with fixed speed compr.

This analysis compares the performance values of three full inverter air cooled chillers i-FR-G05-Z with the efficiency of three high efficiency chillers featuring fixed speed compressors.



Chiller with fixed speed compressors

Cooling capacity: 751 kW (26/18°C, 35°C)
EER: 3,57 (26/18°C, 35°C)
SEPR HT: 5,22 **Length:** 5250 mm




i-FR-G05-Z/A

Cooling capacity: 750 kW (26/18°C, 35°C)
EER: 3,75 (26/18°C, 35°C)
SEPR HT: 5,89 **Length:** 5400 mm

Electrical energy


[kWh/year]

■ Fixed speed unit: 100%
 ■ i-FR-G05-Z/A 4822:88% **-12%** Energy Consumption

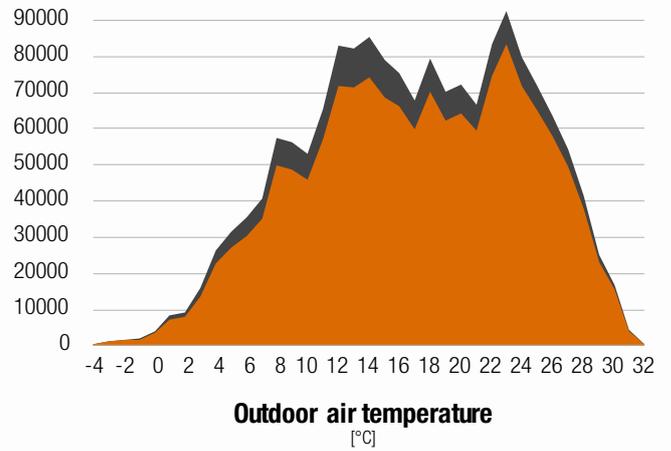

€
Thousands

Payback Time

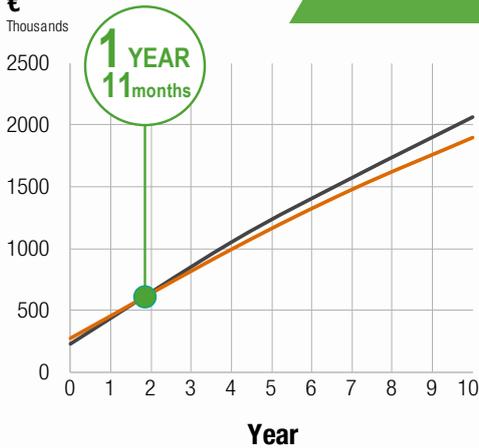

Results

The results obtained comparing the HVAC plant with fixed speed compressor chillers and the plant based on the new inverter screw compressor chillers are brilliant:

Even if the two units feature similar footprint, the new unit achieves an annual energy efficiency 14% higher than the latest generation fixed speed unit, resulting in an annual energy consumption reduced by 12%.

This leads to a payback time of only 1 year and 11 months.

AT A GLANCE



Power input saving

198.991 kWh per year

CO₂ saved per year

89.307 kg, equivalent to CO₂ emissions produced by a petrol car driving 525.296 km

Payback period

1 year and 11 months

Annual energy efficiency

+14 %

ACCESSORIES AND SERVICES

MICROCHANNEL COILS

Al - Regular (std)



Al - E-coating (Opt. 876)



3120 h
SWAAT test
(ASTM G85-02 A3)

✓ UV rays
excellent

E-coating process

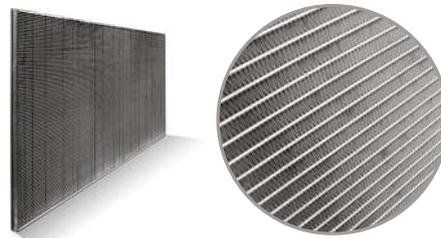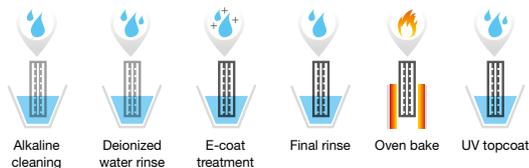

TUBE & FIN COILS

Cu/Al - Regular (Opt. 879)

Cu/Al - Pre-painted fins (Opt. 894)

Cu/Al - High pressure spray coating (Opt. 895 / RFQ)

Fin Guard Silver SB *

Opt. 895

Polyurethane resin with
aluminum fillers

✓ **3000 h** ASTM B117

✓ **UV rays** - excellent

* Thermoguard

PoluAl XT *

RFQ

Polyurethane resin with
aluminum fillers

✓ **4000 h** ASTM B117

✓ **UV rays** - excellent

* Blygold

Heresite P-413C *

RFQ

Phenolic resin

✓ **6000 h** ASTM B117

✓ **UV rays** - good

* Heresite Protective Coating, LLC



Cu/Cu - Tube & fin coil (Opt. 881)

WITNESS TESTING

Test your chiller before installation and make sure its' performance is totally reliable.

Performance WITNESS TEST

Performance Witness testing is available as additional service in order to allow the final user to see the unit being tested under specific conditions. Carried out within modern and sophisticated facilities, this service gives the customer the possibility to choose among different witness test options in order to:

- ▶ Verify unit operation under severe conditions
- ▶ Detect sound emissions
- ▶ Check performance, both at full and partial loads
- ▶ Test the unit with low outdoor air temperature operation
- ▶ Time the fast restart



EQUIPMENT FOR MISSION CRITICAL APPLICATIONS

Committed to ensure the highest standards of reliability, i-FR-G05-Z includes a full range of devices and functions that maximize unit's uptime in case of emergency circumstances.

FAST RESTART

Ensures a **faster return to the necessary cooling** levels in the shortest time possible, while maintaining the **reliability** of the chiller.



Ensure fast cooling start-up



Have the unit running at full load in a shorter time

A 2-cpr unit in standard working conditions delivers 100% of cooling capacity within 180" after power is restored.

Fast restart - UPS excluded (Opt.4501)


This option requires an external 230V AC UPS, not supplied with the unit, to keep the on-board controller functional and ensure fast restart after a power outage.

Fast restart - UPS included (Opt. 4502)

This option includes an electric device capable of keeping the controller power supply uninterrupted during a power failure. The capacity of this device is selected on the basis of the needs of a specific project.

DOUBLE POWER SUPPLY

Redundancy increases uptime. i-FR-G05-Z extends this concept also to the electrical supply: the unit, equipped with an ATS*, can be connected to two separate power lines to enhance the system's dependability.

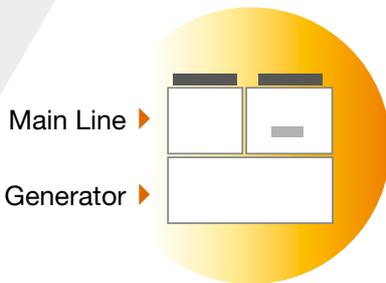

In case of a main line power outage, the ATS* automatically switches over to the backup line, granting uninterrupted power supply to the unit. The double power supply makes i-FR-G05-Z suitable for Uptime Institute's TIER III and TIER IV** design topologies, the highest standards of reliability.

* ATS: Automatic Transfer Switch

** The Tier Classification System provides the data center industry with a consistent method to compare typically unique facilities based on expected site infrastructure performance, or uptime.

Double power supply (ATS) (Opt. 1561)

The ATS, installed within the electrical board, automatically senses if one of the sources has lost or gained power. The switching is completely automatic (line priority and frequency of checking are selectable).

Double power supply (Motorized changeover) (Opt. 1562)

The motorized changeover, installed within the electrical board, is with remote control (i.e. signal of generator start-up).

ENERGY METER

You can't manage what you don't measure.

PUE (Power usage effectiveness) is the ratio that determines how energy efficient data centers are comparing the power currently used for the IT equipment with the power used by the infrastructure which keeps that IT equipment working, including the cooling system. Energy meter option allows to acquire the electrical data and the power absorbed by the unit and send them to the supervisor for energy metering.



i-FR-G05-Z 2202 - 7223

Air cooled chillers with inverter screw compressors (from 477 to 1697 kW)



i-FR-G05-Z/K

Model		2202	2602	2652	2702	2722	3152	3602
Power supply	V/ph/Hz	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50
PERFORMANCE								
COOLING ONLY (GROSS VALUE)								
Cooling capacity	kW	478,6	531,1	561,2	598,1	656,7	720,7	801,4
Total power input	kW	172,0	189,2	198,6	209,1	237,2	263,0	290,3
EER	kW/kW	2,783	2,807	2,826	2,860	2,769	2,740	2,761
COOLING ONLY (EN14511 VALUE)								
Cooling capacity	(1)(2) kW	477,3	529,4	559,6	596,2	654,7	718,2	798,9
EER	(1)(2) kW/kW	2,750	2,770	2,800	2,830	2,740	2,710	2,730
Cooling energy class		C	C	C	C	C	C	C
SEPR	(3)(4)	5,56	5,51	5,51	5,51	5,50	5,51	5,54
COOLING ONLY (GROSS VALUE)								
16°C/10°C								
Cooling capacity	(5) kW	523,5	580,9	614,5	655,2	718,8	788,5	877,1
Total power input	(5) kW	178,8	196,8	206,7	217,7	247,7	276,0	306,1
EER	(5) kW/kW	2,928	2,952	2,973	3,010	2,902	2,857	2,865
23°C/15°C								
Cooling capacity	(6) kW	599,1	665,1	704,8	752,0	824,0	903,3	1005
Total power input	(6) kW	188,9	208,3	219,0	230,8	264,2	297,7	333,3
EER	(6) kW/kW	3,172	3,193	3,218	3,258	3,119	3,034	3,015
EXCHANGERS								
HEAT EXCHANGER USER SIDE IN REFRIGERATION								
Water flow	l/s	22,89	25,40	26,84	28,60	31,40	34,47	38,33
Pressure drop	(1)(2) kPa	32,0	39,5	35,2	40,0	38,3	46,2	40,7
REFRIGERANT CIRCUIT								
Compressors nr.	N°	2	2	2	2	2	2	2
No. Circuits	N°	2	2	2	2	2	2	2
Refrigerant charge	kg	79,0	87,0	92,0	101	108	120	135
NOISE LEVEL								
Sound Pressure	(7) dB(A)	67	68	68	68	69	68	68
Sound power level in cooling	(8)(9) dB(A)	99	100	100	100	101	101	101
SIZE AND WEIGHT								
A	(10) mm	4150	5400	5400	5400	5400	6650	6650
B	(10) mm	2260	2260	2260	2260	2260	2260	2260
H	(10) mm	2500	2500	2500	2500	2500	2500	2500
Operating weight	(10) kg	4790	5270	5280	5330	5720	6210	6270

Model		3902	4202	4502	4802	4812	4822	5412
Power supply	V/ph/Hz	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50
PERFORMANCE								
COOLING ONLY (GROSS VALUE)								
Cooling capacity	kW	874,1	932,0	990,3	1029	1054	1128	1169
Total power input	kW	312,1	331,0	358,1	383,8	366,8	405,3	430,5
EER	kW/kW	2,801	2,816	2,765	2,681	2,874	2,783	2,715
COOLING ONLY (EN14511 VALUE)								
Cooling capacity	(1)(2) kW	871,3	928,7	987,3	1026	1050	1124	1166
EER	(1)(2) kW/kW	2,770	2,780	2,730	2,650	2,840	2,750	2,690
Cooling energy class		C	C	C	D	C	C	D
SEPR	(3)(4)	5,50	5,50	5,61	5,60	5,50	5,50	5,67
COOLING ONLY (GROSS VALUE)								
16°C/10°C								
Cooling capacity	(5) kW	954,6	1015	1080	1123	1153	1233	1276
Total power input	(5) kW	328,5	347,6	375,4	402,2	382,6	423,7	450,0
EER	(5) kW/kW	2,906	2,920	2,877	2,792	3,014	2,910	2,836
23°C/15°C								
Cooling capacity	(6) kW	1062	1098	1203	1279	1318	1409	1455
Total power input	(6) kW	339,8	343,2	386,8	432,3	408,1	453,6	481,7
EER	(6) kW/kW	3,125	3,199	3,110	2,959	3,230	3,106	3,021
EXCHANGERS								
HEAT EXCHANGER USER SIDE IN REFRIGERATION								
Water flow	l/s	41,80	44,57	47,36	49,20	50,41	53,94	55,90
Pressure drop	(1)(2) kPa	42,8	48,7	42,4	45,8	48,1	51,7	41,7
REFRIGERANT CIRCUIT								
Compressors nr.	N°	2	2	2	2	2	2	2
No. Circuits	N°	2	2	2	2	2	2	2
Refrigerant charge	kg	146	155	161	168	174	189	193
NOISE LEVEL								
Sound Pressure	(7) dB(A)	69	70	70	71	71	72	72
Sound power level in cooling	(8)(9) dB(A)	102	103	103	104	104	105	105
SIZE AND WEIGHT								
A	(10) mm	7900	7900	7900	7900	9150	9150	9150
B	(10) mm	2260	2260	2260	2260	2260	2260	2260
H	(10) mm	2500	2500	2500	2500	2500	2500	2500
Operating weight	(10) kg	6700	6740	7350	7750	8220	8340	8500

Notes:

- Plant (side) cooling exchanger water (in/out) 12°C/7°C; Source (side) heat exchanger air (in) 35°C.
- Values in compliance with EN14511.
- Seasonal energy efficiency ratio.
- Seasonal energy efficiency of high temperature process cooling [REGULATION (EU) N. 2016/2281].
- Plant (side) cooling exchanger water (in/out) 16°C/ 10°C; Source (side) heat exchanger air (in) 35°C.
- Plant (side) cooling exchanger water (in/out) 23°C/ 15°C; Source (side) heat exchanger air (in) 35°C.
- Average sound pressure level at 10m distance, unit in a free field on a reflective surface; non-binding value calculated from the sound power level.

- Sound power on the basis of measurements made in compliance with ISO 9614.
- Sound power level in cooling, outdoors.
- Unit in standard configuration/execution, without optional accessories.

The units highlighted in this publication contain R513A [GWP₁₀₀ 631] fluorinated greenhouse gases.

Certified data in EUROVENT



Model		6002	6022	6303	6903	7203	7213	7223
Power supply	V/ph/Hz	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50
PERFORMANCE								
COOLING ONLY (GROSS VALUE)								
Cooling capacity	kW	1242	1302	1409	1493	1559	1649	1697
Total power input	kW	438,8	477,1	498,8	544,8	578,9	596,2	618,5
EER	kW/kW	2,830	2,729	2,825	2,740	2,693	2,766	2,744
COOLING ONLY (EN14511 VALUE)								
Cooling capacity	(1)(2) kW	1238	1297	1405	1488	1555	1644	1691
EER	(1)(2) kW/kW	2,800	2,690	2,790	2,710	2,670	2,740	2,710
Cooling energy class		C	D	C	C	D	C	C
SEPR	(3)(4)	5,70	5,56	5,51	5,51	5,51	5,50	5,50
COOLING ONLY (GROSS VALUE) 16°C/10°C								
Cooling capacity	(5) kW	1357	1420	1536	1628	1702	1801	1854
Total power input	(5) kW	457,2	497,2	524,0	570,6	606,9	623,6	647,7
EER	(5) kW/kW	2,968	2,856	2,931	2,853	2,804	2,888	2,862
COOLING ONLY (GROSS VALUE) 23°C/15°C								
Cooling capacity	(6) kW	1550	1618	1661	1827	1941	2056	2117
Total power input	(6) kW	486,6	529,4	517,8	595,7	652,8	668,3	695,2
EER	(6) kW/kW	3,185	3,056	3,208	3,067	2,973	3,076	3,045
EXCHANGERS								
HEAT EXCHANGER USER SIDE IN REFRIGERATION								
Water flow	l/s	59,42	62,28	67,38	71,40	74,58	78,86	81,17
Pressure drop	(1)(2) kPa	47,1	51,8	45,9	51,5	39,6	44,3	50,4
REFRIGERANT CIRCUIT								
Compressors nr.	N°	2	2	3	2	3	3	3
No. Circuits	N°	2	2	3	3	3	3	3
Refrigerant charge	kg	208	214	236	244	254	273	288
NOISE LEVEL								
Sound Pressure	(7) dB(A)	72	72	72	72	72	73	73
Sound power level in cooling	(8)(9) dB(A)	105	105	105	105	105	106	106
SIZE AND WEIGHT								
A	(10) mm	10400	10400	11650	11650	11650	12900	12900
B	(10) mm	2260	2260	2260	2260	2260	2260	2260
H	(10) mm	2500	2500	2500	2500	2500	2500	2500
Operating weight	(10) kg	8890	9000	10650	11460	11840	12350	12430




Notes:

- 1 ▶ Plant (side) cooling exchanger water (in/out) 12°C/7°C; Source (side) heat exchanger air (in) 35°C.
- 2 ▶ Values in compliance with EN14511.
- 3 ▶ Seasonal energy efficiency ratio.
- 4 ▶ Seasonal energy efficiency of high temperature process cooling [REGULATION (EU) N. 2016/2281].
- 5 ▶ Plant (side) cooling exchanger water (in/out) 16°C/ 10°C; Source (side) heat exchanger air (in) 35°C.
- 6 ▶ Plant (side) cooling exchanger water (in/out) 23°C/ 15°C; Source (side) heat exchanger air (in) 35°C.
- 7 ▶ Average sound pressure level at 10m distance, unit in a free field on a reflective surface; non-binding value calculated from the sound power level.

- 8 ▶ Sound power on the basis of measurements made in compliance with ISO 9614.
- 9 ▶ Sound power level in cooling, outdoors.
- 10 ▶ Unit in standard configuration/execution, without optional accessories.

The units highlighted in this publication contain R513A [GWP₁₀₀ 631] fluorinated greenhouse gases.

Certified data in EUROVENT

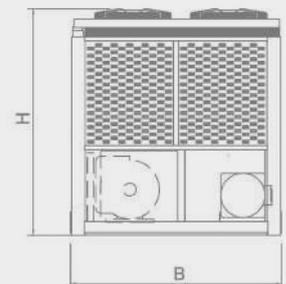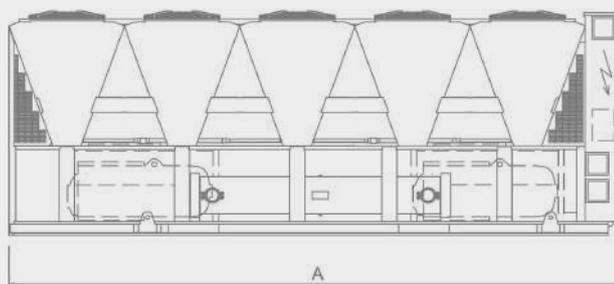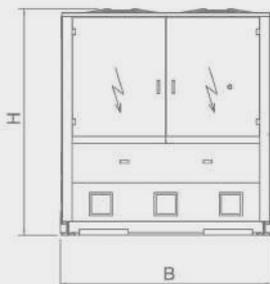

i-FR-G05-Z 2202 - 7223

Air cooled chillers with inverter screw compressors (from 477 to 1697 kW)



i-FR-G05-Z/SL-K

Model		2202	2602	2652	2702	2722	3152	3602
Power supply	V/ph/Hz	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50
PERFORMANCE								
COOLING ONLY (GROSS VALUE)								
Cooling capacity	kW	477,0	516,7	554,6	578,0	662,9	711,3	774,2
Total power input	kW	168,1	177,0	195,5	212,2	228,3	260,2	295,6
EER	kW/kW	2,838	2,919	2,837	2,724	2,904	2,734	2,619
COOLING ONLY (EN14511 VALUE)								
Cooling capacity	(1)(2) kW	475,7	515,1	553,0	576,3	660,9	708,9	772,0
EER	(1)(2) kW/kW	2,810	2,880	2,810	2,690	2,870	2,700	2,590
Cooling energy class		C	C	C	D	C	C	D
SEPR	(3)(4)	5,73	5,68	5,68	5,50	5,52	5,60	5,63
COOLING ONLY (GROSS VALUE)								
16°C/10°C								
Cooling capacity	(5) kW	522,0	565,5	607,6	632,9	726,3	778,4	846,7
Total power input	(5) kW	174,7	183,9	203,4	221,1	238,2	273,2	312,4
EER	(5) kW/kW	2,988	3,075	2,987	2,863	3,049	2,849	2,710
23°C/15°C								
Cooling capacity	(6) kW	598,1	647,9	697,4	725,8	833,9	892,0	987,2
Total power input	(6) kW	184,6	194,2	215,5	234,7	253,9	294,8	336,5
EER	(6) kW/kW	3,240	3,336	3,236	3,092	3,284	3,026	2,934
EXCHANGERS								
HEAT EXCHANGER USER SIDE IN REFRIGERATION								
Water flow	l/s	22,81	24,71	26,52	27,64	31,70	34,02	37,02
Pressure drop	(1)(2) kPa	31,8	37,4	34,4	37,3	39,1	45,0	38,0
REFRIGERANT CIRCUIT								
Compressors nr.	N°	2	2	2	2	2	2	2
No. Circuits	N°	2	2	2	2	2	2	2
Refrigerant charge	kg	83,0	91,0	97,0	101	116	125	135
NOISE LEVEL								
Sound Pressure	(7) dB(A)	60	61	61	61	61	61	61
Sound power level in cooling	(8)(9) dB(A)	92	93	93	93	94	94	94
SIZE AND WEIGHT								
A	(10) mm	5400	5400	5400	5400	6650	6650	6650
B	(10) mm	2260	2260	2260	2260	2260	2260	2260
H	(10) mm	2500	2500	2500	2500	2500	2500	2500
Operating weight	(10) kg	5450	5600	5620	5650	6560	6580	6590

Model		3902	4202	4502	4802	4812	4822	5412
Power supply	V/ph/Hz	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50
PERFORMANCE								
COOLING ONLY (GROSS VALUE)								
Cooling capacity	kW	845,6	903,1	972,7	1028	1046	1120	1162
Total power input	kW	317,7	336,9	356,8	373,5	359,4	397,2	422,1
EER	kW/kW	2,662	2,681	2,726	2,752	2,910	2,820	2,753
COOLING ONLY (EN14511 VALUE)								
Cooling capacity	(1)(2) kW	843,1	900,1	969,8	1025	1042	1116	1159
EER	(1)(2) kW/kW	2,630	2,650	2,700	2,720	2,870	2,780	2,720
Cooling energy class		D	D	C	C	C	C	C
SEPR	(3)(4)	5,50	5,50	5,66	5,64	5,63	5,55	5,67
COOLING ONLY (GROSS VALUE)								
16°C/10°C								
Cooling capacity	(5) kW	922,6	982,7	1061	1123	1144	1225	1270
Total power input	(5) kW	334,8	354,0	374,2	390,7	374,6	414,8	440,9
EER	(5) kW/kW	2,756	2,776	2,835	2,874	3,054	2,953	2,880
23°C/15°C								
Cooling capacity	(6) kW	1043	1078	1203	1306	1310	1402	1478
Total power input	(6) kW	343,1	346,4	380,6	412,0	399,0	443,3	464,8
EER	(6) kW/kW	3,040	3,112	3,161	3,170	3,283	3,163	3,180
EXCHANGERS								
HEAT EXCHANGER USER SIDE IN REFRIGERATION								
Water flow	l/s	40,44	43,19	46,52	49,15	50,01	53,58	55,57
Pressure drop	(1)(2) kPa	40,1	45,7	40,9	45,7	47,3	51,0	41,2
REFRIGERANT CIRCUIT								
Compressors nr.	N°	2	2	2	2	2	2	2
No. Circuits	N°	2	2	2	2	2	2	2
Refrigerant charge	kg	146	155	168	178	183	198	204
NOISE LEVEL								
Sound Pressure	(7) dB(A)	62	63	63	63	63	63	63
Sound power level in cooling	(8)(9) dB(A)	95	96	96	96	96	96	96
SIZE AND WEIGHT								
A	(10) mm	7900	7900	9150	9150	10400	10400	10400
B	(10) mm	2260	2260	2260	2260	2260	2260	2260
H	(10) mm	2500	2500	2500	2500	2500	2500	2500
Operating weight	(10) kg	7050	7100	8110	8550	9010	9130	9310

Notes:

- Plant (side) cooling exchanger water (in/out) 12°C/7°C; Source (side) heat exchanger air (in) 35°C.
- Values in compliance with EN14511.
- Seasonal energy efficiency ratio.
- Seasonal energy efficiency of high temperature process cooling [REGULATION (EU) N. 2016/2281].
- Plant (side) cooling exchanger water (in/out) 16°C/ 10°C; Source (side) heat exchanger air (in) 35°C.
- Plant (side) cooling exchanger water (in/out) 23°C/ 15°C; Source (side) heat exchanger air (in) 35°C.
- Average sound pressure level at 10m distance, unit in a free field on a reflective surface; non-binding value calculated from the sound power level.

- Sound power on the basis of measurements made in compliance with ISO 9614.
- Sound power level in cooling, outdoors.
- Unit in standard configuration/execution, without optional accessories.

The units highlighted in this publication contain R513A [GWP₁₀₀ 631] fluorinated greenhouse gases.

Certified data in EUROVENT



Model		6002	6022	6303	6903	7203	7213	7223
Power supply	V/ph/Hz	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50
PERFORMANCE								
COOLING ONLY (GROSS VALUE)								
Cooling capacity	kW	1199	1290	1365	1474	1541	1590	1635
Total power input	kW	446,5	470,5	507,7	541,1	572,2	610,0	633,6
EER	kW/kW	2,685	2,742	2,689	2,724	2,693	2,607	2,580
COOLING ONLY (EN14511 VALUE)								
Cooling capacity	(1)(2) kW	1195	1286	1361	1469	1537	1586	1630
EER	(1)(2) kW/kW	2,660	2,710	2,660	2,690	2,670	2,580	2,550
Cooling energy class		D	C	D	D	D	D	D
SEPR	(3)(4)	5,76	5,65	5,70	5,84	5,76	5,66	5,61
COOLING ONLY (GROSS VALUE) 16°C/10°C								
Cooling capacity	(5) kW	1308	1408	1486	1608	1683	1734	1821
Total power input	(5) kW	466,4	490,2	533,5	566,9	599,8	639,9	653,8
EER	(5) kW/kW	2,804	2,872	2,785	2,836	2,806	2,710	2,785
COOLING ONLY (GROSS VALUE) 23°C/15°C								
Cooling capacity	(6) kW	1522	1605	1631	1839	1961	2019	2079
Total power input	(6) kW	491,2	521,6	522,7	583,3	632,7	674,6	701,8
EER	(6) kW/kW	3,099	3,077	3,120	3,153	3,099	2,993	2,962
EXCHANGERS								
HEAT EXCHANGER USER SIDE IN REFRIGERATION								
Water flow	l/s	57,32	61,67	65,28	70,50	73,70	76,02	78,18
Pressure drop	(1)(2) kPa	43,9	50,8	43,1	50,2	38,7	41,2	46,7
REFRIGERANT CIRCUIT								
Compressors nr.	N°	2	2	3	2	3	2	3
No. Circuits	N°	2	2	3	3	3	3	3
Refrigerant charge	kg	208	224	236	255	267	278	288
NOISE LEVEL								
Sound Pressure	(7) dB(A)	63	63	63	63	63	64	64
Sound power level in cooling	(8)(9) dB(A)	96	96	96	96	96	97	97
SIZE AND WEIGHT								
A	(10) mm	10400	11650	11650	12900	12900	12900	12900
B	(10) mm	2260	2260	2260	2260	2260	2260	2260
H	(10) mm	2500	2500	2500	2500	2500	2500	2500
Operating weight	(10) kg	9270	9790	11140	12390	12770	12850	12930




Notes:

- 1 ▶ Plant (side) cooling exchanger water (in/out) 12°C/7°C; Source (side) heat exchanger air (in) 35°C.
- 2 ▶ Values in compliance with EN14511.
- 3 ▶ Seasonal energy efficiency ratio.
- 4 ▶ Seasonal energy efficiency of high temperature process cooling [REGULATION (EU) N. 2016/2281].
- 5 ▶ Plant (side) cooling exchanger water (in/out) 16°C/ 10°C; Source (side) heat exchanger air (in) 35°C.
- 6 ▶ Plant (side) cooling exchanger water (in/out) 23°C/ 15°C; Source (side) heat exchanger air (in) 35°C.
- 7 ▶ Average sound pressure level at 10m distance, unit in a free field on a reflective surface; non-binding value calculated from the sound power level.

- 8 ▶ Sound power on the basis of measurements made in compliance with ISO 9614.
- 9 ▶ Sound power level in cooling, outdoors.
- 10 ▶ Unit in standard configuration/execution, without optional accessories.

The units highlighted in this publication contain R513A [GWP₁₀₀ 631] fluorinated greenhouse gases.

Certified data in EUROVENT

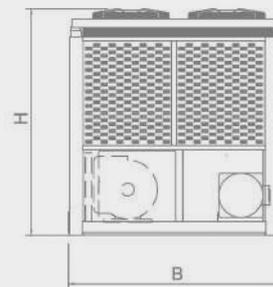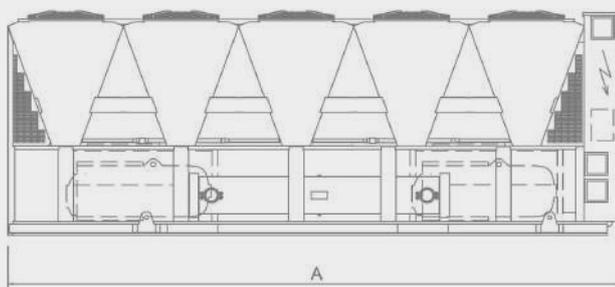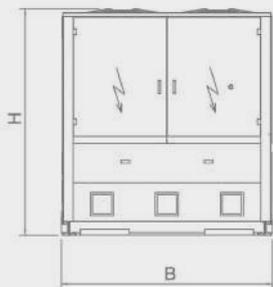

i-FR-G05-Z 2202 - 7223

Air cooled chillers with inverter screw compressors (from 477 to 1697 kW)



i-FR-G05-Z/A

Model		2202	2602	2652	2702	2722	3152	3602	3902
Power supply	V/ph/Hz	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50
PERFORMANCE									
COOLING ONLY (GROSS VALUE)									
Cooling capacity	kW	510,2	551,9	590,0	626,9	684,3	767,2	839,9	899,4
Total power input	kW	163,5	177,8	189,4	203,0	222,2	257,2	286,0	303,4
EER	kW/kW	3,120	3,104	3,115	3,088	3,080	2,983	2,937	2,964
COOLING ONLY (EN14511 VALUE)									
Cooling capacity	(1)(2) kW	508,7	550,4	588,2	624,8	682,1	765,0	837,1	896,4
EER	(1)(2) kW/kW	3,080	3,070	3,080	3,050	3,040	2,950	2,900	2,930
Cooling energy class		B	B	B	B	B	B	B	B
SEPR	(3)(4)	5,98	5,89	5,87	5,92	5,77	5,87	5,88	5,67
COOLING ONLY (GROSS VALUE)									
16°C/10°C									
Cooling capacity	(5) kW	559,2	605,1	647,1	687,6	750,2	841,2	920,2	983,7
Total power input	(5) kW	169,5	184,6	196,7	210,9	231,6	269,5	300,8	319,0
EER	(5) kW/kW	3,299	3,278	3,290	3,260	3,239	3,121	3,059	3,084
23°C/15°C									
Cooling capacity	(6) kW	642,0	695,3	743,9	790,9	862,1	966,8	1057	1098
Total power input	(6) kW	178,3	194,7	207,9	223,2	246,4	290,1	326,4	329,7
EER	(6) kW/kW	3,601	3,571	3,578	3,543	3,499	3,333	3,238	3,330
EXCHANGERS									
HEAT EXCHANGER USER SIDE IN REFRIGERATION									
Water flow	l/s	24,40	26,39	28,22	29,98	32,73	36,69	40,16	43,01
Pressure drop	(1)(2) kPa	36,4	34,0	38,9	43,9	41,6	37,3	44,7	45,3
REFRIGERANT CIRCUIT									
Compressors nr.	N°	2	2	2	2	2	2	2	2
No. Circuits	N°	2	2	2	2	2	2	2	2
Refrigerant charge	kg	91,0	93,0	100	106	115	130	141	153
NOISE LEVEL									
Sound Pressure	(7) dB(A)	67	68	67	67	68	68	68	69
Sound power level in cooling	(8)(9) dB(A)	99	100	100	100	101	101	101	102
SIZE AND WEIGHT									
A	(10) mm	5400	5400	6650	6650	6650	7900	7900	9150
B	(10) mm	2260	2260	2260	2260	2260	2260	2260	2260
H	(10) mm	2500	2500	2500	2500	2500	2500	2500	2500
Operating weight	(10) kg	5180	5240	5720	5800	6210	6620	6670	7080

Model		4202	4502	4802	4822	5412	5703	6303	6603
Power supply	V/ph/Hz	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50
PERFORMANCE									
COOLING ONLY (GROSS VALUE)									
Cooling capacity	kW	959,4	1028	1099	1162	1230	1334	1467	1520
Total power input	kW	320,6	340,0	358,2	388,6	401,1	452,6	493,4	518,9
EER	kW/kW	2,993	3,024	3,068	2,990	3,067	2,947	2,973	2,929
COOLING ONLY (EN14511 VALUE)									
Cooling capacity	(1)(2) kW	955,9	1025	1095	1159	1226	1330	1463	1516
EER	(1)(2) kW/kW	2,950	2,980	3,020	2,960	3,030	2,910	2,940	2,900
Cooling energy class		B	B	B	B	B	B	B	B
SEPR	(3)(4)	5,60	5,73	5,80	5,75	5,71	5,71	5,64	5,61
COOLING ONLY (GROSS VALUE)									
16°C/10°C									
Cooling capacity	(5) kW	1047	1124	1203	1273	1347	1461	1602	1661
Total power input	(5) kW	336,7	355,4	372,6	404,9	416,7	476,4	519,1	544,6
EER	(5) kW/kW	3,110	3,163	3,229	3,144	3,233	3,067	3,086	3,050
23°C/15°C									
Cooling capacity	(6) kW	1137	1259	1381	1459	1545	1648	1742	1843
Total power input	(6) kW	332,6	364,3	395,6	431,0	441,6	500,8	514,2	553,7
EER	(6) kW/kW	3,419	3,456	3,491	3,385	3,499	3,291	3,388	3,329
EXCHANGERS									
HEAT EXCHANGER USER SIDE IN REFRIGERATION									
Water flow	l/s	45,88	49,16	52,54	55,59	58,81	63,78	70,16	72,70
Pressure drop	(1)(2) kPa	51,6	45,7	50,1	41,2	46,2	41,1	35,1	37,7
REFRIGERANT CIRCUIT									
Compressors nr.	N°	2	2	2	2	2	4	3	4
No. Circuits	N°	2	2	2	2	2	3	3	3
Refrigerant charge	kg	162	174	185	199	209	227	260	258
NOISE LEVEL									
Sound Pressure	(7) dB(A)	70	70	71	72	72	72	72	72
Sound power level in cooling	(8)(9) dB(A)	103	103	104	105	105	105	105	105
SIZE AND WEIGHT									
A	(10) mm	9150	10400	10400	10400	11650	12900	12900	12900
B	(10) mm	2260	2260	2260	2260	2260	2260	2260	2260
H	(10) mm	2500	2500	2500	2500	2500	2500	2500	2500
Operating weight	(10) kg	7120	8110	8550	8810	9280	10880	10920	11610

Notes:

- 1 ▶ Plant (side) cooling exchanger water (in/out) 12°C/7°C; Source (side) heat exchanger air (in) 35°C.
- 2 ▶ Values in compliance with EN14511.
- 3 ▶ Seasonal energy efficiency ratio.
- 4 ▶ Seasonal energy efficiency of high temperature process cooling [REGULATION (EU) N. 2016/2281].
- 5 ▶ Plant (side) cooling exchanger water (in/out) 16°C/ 10°C; Source (side) heat exchanger air (in) 35°C.
- 6 ▶ Plant (side) cooling exchanger water (in/out) 23°C/ 15°C; Source (side) heat exchanger air (in) 35°C.
- 7 ▶ Average sound pressure level at 10m distance, unit in a free field on a reflective surface; non-binding value calculated from the sound power level.

- 8 ▶ Sound power on the basis of measurements made in compliance with ISO 9614.
- 9 ▶ Sound power level in cooling, outdoors.
- 10 ▶ Unit in standard configuration/execution, without optional accessories.

The units highlighted in this publication contain R513A [GWP₁₀₀ 631] fluorinated greenhouse gases.

Certified data in EUROVENT



i-FR-G05-Z/SL-A

Model		2202	2602	2652	2702	2722	3152	3602	3902
Power supply	V/ph/Hz	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50
PERFORMANCE									
COOLING ONLY (GROSS VALUE)									
Cooling capacity	kW	498,8	559,5	581,8	615,1	682,8	751,6	811,9	891,5
Total power input	kW	162,3	182,7	185,5	202,2	216,8	251,1	275,3	295,2
EER	kW/kW	3,073	3,062	3,136	3,042	3,149	2,993	2,949	3,020
COOLING ONLY (EN14511 VALUE)									
Cooling capacity	(1)(2) kW	497,4	557,9	580,0	613,4	680,6	749,5	809,4	888,6
EER	(1)(2) kW/kW	3,040	3,040	3,100	3,010	3,110	2,960	2,910	2,980
Cooling energy class		B	B	A	B	A	B	B	B
SEPR	(3)(4)	6,10	5,98	5,93	5,94	5,80	5,92	5,98	5,90
COOLING ONLY (GROSS VALUE)									
16°C/10°C									
Cooling capacity	(5) kW	546,3	613,6	638,1	674,9	749,0	824,1	890,1	975,7
Total power input	(5) kW	168,5	190,0	192,8	210,5	225,8	263,4	289,5	310,5
EER	(5) kW/kW	3,242	3,229	3,310	3,206	3,317	3,129	3,075	3,142
23°C/15°C									
Cooling capacity	(6) kW	626,7	705,4	733,8	776,4	861,6	947,2	1023	1117
Total power input	(6) kW	177,8	201,1	203,9	223,5	240,2	283,9	313,9	336,9
EER	(6) kW/kW	3,525	3,508	3,599	3,474	3,587	3,336	3,259	3,316
EXCHANGERS									
HEAT EXCHANGER USER SIDE IN REFRIGERATION									
Water flow	l/s	23,85	26,76	27,82	29,42	32,65	35,94	38,83	42,63
Pressure drop	(1)(2) kPa	34,8	35,0	37,8	33,6	41,5	35,8	41,8	44,5
REFRIGERANT CIRCUIT									
Compressors nr.	N°	2	2	2	2	2	2	2	2
No. Circuits	N°	2	2	2	2	2	2	2	2
Refrigerant charge	kg	91,0	101	106	112	123	136	148	162
NOISE LEVEL									
Sound Pressure	(7) dB(A)	60	60	60	60	61	61	61	62
Sound power level in cooling	(8)(9) dB(A)	92	93	93	93	94	94	94	95
SIZE AND WEIGHT									
A	(10) mm	5400	6650	6650	6650	7900	7900	9150	10400
B	(10) mm	2260	2260	2260	2260	2260	2260	2260	2260
H	(10) mm	2500	2500	2500	2500	2500	2500	2500	2500
Operating weight	(10) kg	5490	6030	6080	6400	6990	6990	7460	7860

Model		4202	4502	4802	4822	5412	5703	6303
Power supply	V/ph/Hz	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50
PERFORMANCE								
COOLING ONLY (GROSS VALUE)								
Cooling capacity	kW	942,8	1016	1086	1149	1213	1332	1462
Total power input	kW	312,4	331,8	350,0	380,1	393,2	456,9	493,5
EER	kW/kW	3,018	3,062	3,103	3,023	3,085	2,915	2,963
COOLING ONLY (EN14511 VALUE)								
Cooling capacity	(1)(2) kW	939,4	1013	1082	1146	1209	1328	1458
EER	(1)(2) kW/kW	2,980	3,020	3,060	2,990	3,050	2,880	2,930
Cooling energy class		B	B	B	B	B	C	B
SEPR	(3)(4)	5,85	5,96	5,90	5,83	5,89	5,98	5,93
COOLING ONLY (GROSS VALUE)								
16°C/10°C								
Cooling capacity	(5) kW	1029	1112	1190	1259	1329	1458	1594
Total power input	(5) kW	328,3	346,8	364,0	396,0	408,6	481,9	519,9
EER	(5) kW/kW	3,134	3,206	3,269	3,179	3,253	3,026	3,066
23°C/15°C								
Cooling capacity	(6) kW	1120	1247	1366	1444	1524	1644	1730
Total power input	(6) kW	324,3	355,4	386,3	421,4	433,1	508,4	514,9
EER	(6) kW/kW	3,454	3,509	3,536	3,427	3,519	3,234	3,360
EXCHANGERS								
HEAT EXCHANGER USER SIDE IN REFRIGERATION								
Water flow	l/s	45,09	48,60	51,92	54,96	58,00	63,72	69,92
Pressure drop	(1)(2) kPa	49,8	44,7	48,9	40,3	44,9	41,0	34,8
REFRIGERANT CIRCUIT								
Compressors nr.	N°	2	2	2	2	2	4	3
No. Circuits	N°	2	2	2	2	2	3	3
Refrigerant charge	kg	171	184	197	210	220	237	260
NOISE LEVEL								
Sound Pressure	(7) dB(A)	63	63	63	63	63	63	63
Sound power level in cooling	(8)(9) dB(A)	96	96	96	96	96	96	96
SIZE AND WEIGHT								
A	(10) mm	10400	11650	11650	11650	12900	12900	12900
B	(10) mm	2260	2260	2260	2260	2260	2260	2260
H	(10) mm	2500	2500	2500	2500	2500	2500	2500
Operating weight	(10) kg	8080	8860	9310	9640	10080	11410	11420

Notes:

- 1 ▶ Plant (side) cooling exchanger water (in/out) 12°C/7°C; Source (side) heat exchanger air (in) 35°C.
- 2 ▶ Values in compliance with EN14511.
- 3 ▶ Seasonal energy efficiency ratio.
- 4 ▶ Seasonal energy efficiency of high temperature process cooling [REGULATION (EU) N. 2016/2281].
- 5 ▶ Plant (side) cooling exchanger water (in/out) 16°C/ 10°C; Source (side) heat exchanger air (in) 35°C.
- 6 ▶ Plant (side) cooling exchanger water (in/out) 23°C/ 15°C; Source (side) heat exchanger air (in) 35°C.
- 7 ▶ Average sound pressure level at 10m distance, unit in a free field on a reflective surface; non-binding value calculated from the sound power level.

- 8 ▶ Sound power on the basis of measurements made in compliance with ISO 9614.
- 9 ▶ Sound power level in cooling, outdoors.
- 10 ▶ Unit in standard configuration/execution, without optional accessories.

The units highlighted in this publication contain R513A [GWP₁₀₀ 631] fluorinated greenhouse gases.

Certified data in EUROVENT

FURTHER OPTIONS

Auxiliary input

- 4-20 mA (Opt. 6161):** Enables remote set-point adjustments (analog input).
- Double set-point (Opt. 6162):** Enables the remote switch between 2 set-points (digital input).
- Demand limit (Opt. 6171):** Limits the unit's power absorption for safety reasons or in temporary situations (digital input).

Electrical

- Automatic circuit breakers for all major electrical loads (compressors excluded) (Opt. 3414):** Protect all the major electrical loads (compressors excluded) from possible current peaks, over-current switches are provided in place of the standard fuses. The compressors are already protected by extra-fast sectionable fuses.

Connectivity

- Serial card interface module to allow integration with BMS protocols:
Modbus (Opt. 4181) / LonWorks (Opt. 4182) / BACnet MS/TP (Opt. 4184) / BACnet over IP (Opt. 4185)
- M-Net interface kit (Opt. 4187):** Interface module to allow the integration of the unit with Mitsubishi Electric proprietary communication protocol M-Net.

Energy Meter

- Energy meter for BMS (Opt. 5924):** Acquires electrical data and the power absorbed by the unit and send them the BMS for energy metering (Modbus RS485).

Refrigerant circuit

- Dual pressure relief valves with switch (Opt. 1961):** One valve is isolated from the refrigerant circuit while the other is in service. The user can work on the isolated valve for periodic maintenance or replacement, without removing the refrigerant from the circuit.
- Compressor suction valve (Opt. 1901):** Installed on each compressor suction line, it simplifies maintenance activity (discharge valves are present as per standard).

Refrigerant leak detector

- Leak detector (Opt. 3431):** Factory installed device. In case of a gas leak detection it raises an alarm.
- Leak detector + compressor off (Opt. 3433):** Factory installed device. In case of a gas leak detection it raises an alarm and stops the units.

Hydraulic

- Water flow switch (Opt. 1801):** Designed to protect the unit where the water flow across the evaporator is not sufficient and falls outside of the operating parameters.
- Delta T > 8°C (Opt. 2881):** Evaporator designed to operate with low primary circuit water flow.
- Flanged hydraulic connections (Opt. 2911):** Grooved coupling with flanged counter-pipe.

Structure

- Anti-intrusion grilles (Opt. 2021):** Perimeter metal grilles to protect against the intrusion of solid bodies into the unit structure.
- Rubber type (Opt. 2101) or spring type (Opt. 2102) anti-vibration mountings:** Reduce vibrations, keeping noise transmission to a minimum.

Packing

- Reinforcing bars (Opt. 1971):** Steel brackets used to strengthen the unit structure. Suggested in case of long truck transport.
- Nylon packing (Opt. 9966):** i-FR-G05-Z is covered with a protective nylon layer and provided with the lifting eye-plates, to load the unit into a truck.
- Container packing (Opt. 9979):** i-FR-G05-Z is covered with a protective nylon layer, provided with structural reinforcing bars and equipped with both lifting eye-plates and handling devices to load it on a container (metal slides, front handling bar).

A SELECTION OF RC INSTALLATIONS

BNP PARIBAS

2015 BAILLY ROMAINVILLIERS
(FRANCE)

Application:
Data Center

Plant type:
Hydronic System

Cooling capacity: 12208 kW

Installed machines:
2x FR FC-Z NG free-cooling chillers with screw compressors, 10x FRCS2-Z air cooled chillers with screw compressors, 28x indoor close control air conditioners



PROJECT

Val d'Europe was built in conjunction with The Walt Disney Company, who wished to create a town near the Resort. In this modern and fast-moving context BNP Paribas decided to establish their new data center.

CHALLENGE

The new project consists of two buildings of 1630 and 9990 m², located on a 74,965 m² piece of land aimed at combining the landscaping requirements with the company's environmental responsibility policy, that is, to reduce their own ecological footprint as much as possible. The new buildings contain offices and 4 data centers that will host and enable IR + Networks + telecom operations of most of the bank's IT production.

SOLUTION

At BNPP Val d'Europe it was supplied a complete system able to combine the reliability and continuous cooling in the data center with sustainability and the perfect level of comfort in the offices. The system is composed of 12 high efficiency chillers and 28 close control units for a total of 12,200 kW and is worth more than one million euros.

Going in depth 2 FR FC-Z NG 3902 SL-T chillers in a super low noise version with a 100% positive free-cooling temperature are able to grant an energy cost very close to zero and reach an EER equal to 36. Furthermore, 10 FRCS2-Z 3602 SL-K-S air source chillers in a compact and super low-noise version have been installed. Inside the data centers 28 close control units have been installed for the precise temperature and humidity control.

MORE THAN 1000 PROJECTS ALL OVER THE WORLD

2017 Bangalore - India Qualcomm India Data Center

Application: Data Center
Plant type: HPAC System
Cooling capacity: 4495 kW
Installed machines:
4x i-FR(1+i)/CA/S-Z high efficiency chillers with fixed speed and inverter speed compressors



2016 Rome - Italy Telecom Data Center - Acilia Tier IV

Application: Data Center
Plant type: Hydronic System
Cooling capacity: 7804 kW
Installed machines:
3x TRCS2/SL-CA-S-Z oil-free compressor chillers,
5x i-FR(1+i)/CA-S-Z fixed speed and inverter speed compressor chillers



RC's chiller units, with their unbeatable advantages in terms of efficiency, quality, and highly reliable standards are already the preferred choice of the major brands in the most prestigious projects all over the world.

2018 Braga - Portugal
REN Data Center

Application: Data Center
Plant type: Hydronic System
Cooling capacity: 1995 kW
Installed machines: :
3x FR-FC-Z free-cooling chiller with screw compressors



2018 Karlskrona - Sweden
Telenor Data Centre

Application: Data Center
Plant type: HPAC System
Cooling capacity: 1866 kW
Installed machines:
3x FR-FC/SL-Z free-cooling chiller with screw compressors, 6x indoor close control air conditioners





for a greener tomorrow

Eco Changes is the Mitsubishi Electric Group's environmental statement, and expresses the Group's stance on environmental management. Through a wide range of businesses, we are helping contribute to the realization of a sustainable society.



MITSUBISHI ELECTRIC HYDRONICS & IT COOLING SYSTEMS S.p.A.

Head Office: Via Roma 5 - 27010 Valle Salimbene (PV) - Italy

Tel +39 (0) 382 433 811 - Fax +39 (0) 382 587 148

www.rcitcooling.com

www.melcohit.com