

**MITSUBISHI ELECTRIC  
HYDRONICS & IT COOLING SYSTEMS S.p.A.**

COMFORT

AIR HANDLING UNITS

# WIZARD

**AIR HANDLING UNITS  
FROM 600 TO 115400 m<sup>3</sup>/h**



# OUR BIGGEST CHALLENGE IS DELIVERING THE BEST SOLUTION FOR YOUR BUILDING.

Every project has particular comfort and technical features.

The Climaveneta brand has extensive experience in air treatment solutions and can offer a specific response to any challenging requirement.






## More challenging requirements

High levels of comfort, together with efficient performance and energy efficiency are key features in Air handling units for traditional applications. The main aim is to maintain constant temperature and humidity levels, ensuring a reduction of operating costs.



## Product quality

The main objective is to ensure high levels of comfort over time. Continuous upgrade of the units' performance and the use of quality components can contribute in extending the life cycle of the plant.

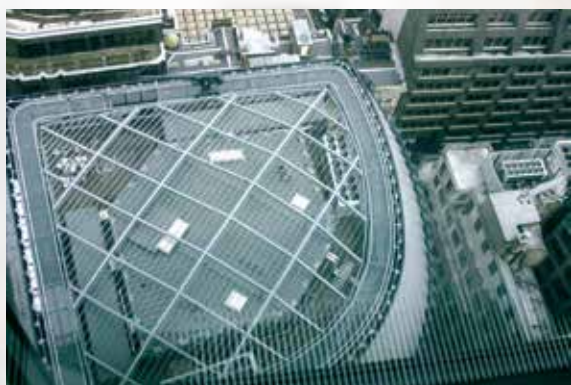

## Versatile and easier installation

Versatility and plug-and-play solutions are fundamental features in traditional applications. The reduction of on-site operations contributes in making the assembly process easier, thus increasing cost savings.



## Focus on Comfort

It is widely recognized that low noise emissions are directly connected to high comfort levels. By improving both comfort and efficiency, the value of the building and the investment increases.

# THE SOLUTIONS



## EASY CONFIGURATION


WIZARD is the ultimate solution in air handling technology. A single and compact unit responds to the various requirements. The correct configuration is ensured by Climaveneta - CTA PRO, a selection software that computes and presents all the necessary data for correct air handling unit selection. The high range of materials, components and accessories together with the total freedom of composition, make the software unique and intuitive.



## ATTENTION TO DETAIL

Each unit is designed in such a way so as to fit in each application. Exceptional quality is built into every component, ensuring not only high efficiency but also exceptional versatility and reliability. This contributes to extending the life cycle of the unit whilst reducing the maintenance costs. The unit is comprised of the highest-quality components that can match any special requirements.

**WIZARD HAS BEEN DESIGNED WITH EXCELLENCE TO SATISFY THE SYSTEM AND TECHNOLOGY REQUIREMENTS OF MODERN BUILDINGS.**



## **PLUG & PLAY SOLUTIONS**

The units have been designed in such a way that if there is not enough room for the units to reach the installation area they can be built and assembled on-site either from modular sections or in CKD configuration. This is possible thanks to special connections that are used to join adjacent functional sections or unit blocks.

These completely versatile units are also characterised by a simplification of the system and a 'Plug & Play' concept to ensure easy installation and commissioning.

When the unit is delivered on site, it can be installed easily, reducing maintenance and further installation costs.

## **LOW NOISE LEVEL**

WIZARD units pay special attention to comfort. In traditional comfort applications, the WIZARD low noise unit combines the best characteristics of a standardized, air handling system with superior efficiency.

In specific projects where low noise level is a priority, WIZARD units are fitted with dedicated components which are much quieter than traditional components.

This makes WIZARD one of the best units of all.

# TECHNOLOGICAL CHOICES




## SMART CONTROL

WIZARD is equipped with the best thermal components available on the market: temperature and humidity probes and high precision differential pressure switches.

The core system that manages all the components is the AHU3000+ controller. This controller ensures the programming of different time bands, increasing the efficiency of the system and reducing the energy consumption when the system isn't working at full load. Key features are:

- Remote control (up to 500 m) thanks to a dedicated panel
- Regulation of the part-load operation according to the set-point and the ambient load
- Monitoring through the web server and BMS compatibility (Modbus, RS-485, Bacnet over-IP).

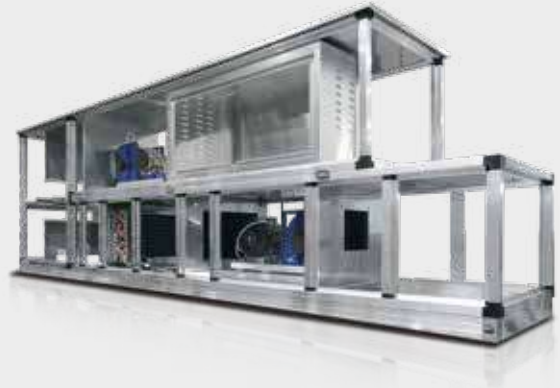

## STURDY CASING

WIZARD units feature a special casing design with different kinds of profiles and panels that can be chosen depending on the purpose of the application.

The high quality level of the structure allows the units to operate at pressures higher than 1000 Pa with minimized air leakages and high mechanical strength.

The panels are manufactured in a such a way so as provide effective thermal and acoustic insulation.

Installation is made easier through the design of modules with connectors that allow easy cleaning of the unit.

## Selection Software

**The design of the AHU is completely configurable thanks to the "Climaveneta - CTA PRO" selection software. This smart tool ensures quick and precise calculations of the unit selection.**

The selection software computes and presents all the necessary data for correct air handling unit selection. All extra accessories can be precisely selected depending on the kind of application.

Data and calculations are quick and easy thanks to an user-friendly interface.



**EFFICIENCY, LOW NOISE LEVEL, RELIABLE OPERATION, ATTENTION TO DETAIL, AND EASY CONFIGURATION. ARE THE DISTINCTIVE FEATURES OF WIZARD UNITS.**



## FANS

A wide array of fan options provides optimal sound and efficiency choices depending on the project's requirements.

The intrinsic efficiency of the fans contributes in improving the overall efficiency of the units, ensuring very low noise emissions.

Fans with variable speed reduce the noise level according to the partial load of the coils and the temperature of the treated air.

EC fans classified IE4 are also available for motor efficiency higher than 90% .



## MONITORING DEVICES


The controller ensures interconnectivity with all monitoring and supervision devices, from performance data analysis and safety systems, to historical data on operating parameters.

The controller can be coupled with third-party controllers, using a common language. The advantages are:

Smart and easy management of a single unit, reduced operating costs, statistics, and prompt response to alarms and failures.

### Main Functions

- ▶ It generates files to be exchanged among the users and the company
- ▶ It creates Word/Pdf files with the specifications of each single unit
- ▶ Always up-to-date data through an Internet connection
- ▶ Different languages can be selected
- ▶ For many unit configurations, it's possible to get the final drawings that represent the complete unit
- ▶ Ability to configure and quote the thermoregulation system

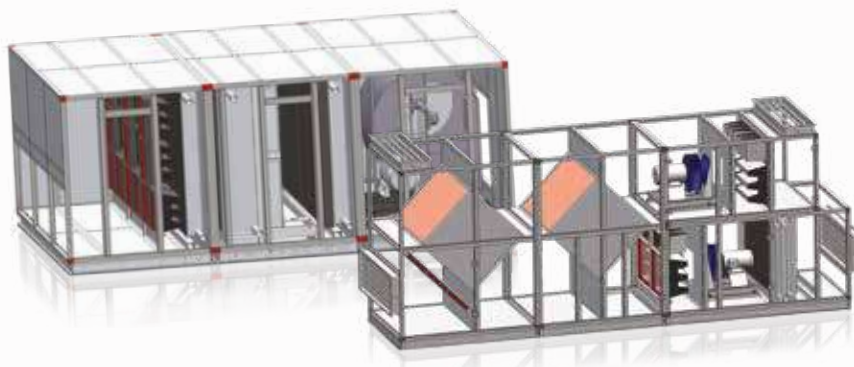

# TEMPERATURE CONTROL TOOLS

WIZARD's temperature and humidity tools installed are among the best components on the market.

The unit is completely plug-and-play and all components are manufactured and assembled in-house.

The result is simple: better performance and a reduction in the installation times and operating costs.




**PLUG FAN  
(AC and EC motor)**



**CENTRIFUGAL FAN**




**HOT/COLD COIL**



**ROTARY RECOVERY  
SYSTEM**



**FILTERS**



**HUMIDIFICATING**



**DAMPER**





# Global Excellence



## PROBES

Temperature and humidity levels together with the air quality analysis happen through probes and pressure transducers.

WIZARD units feature special probes and sensors that can check temperature and humidity levels with high precision. These components are positioned in specific areas of the unit in order to avoid any data reading errors.



## ADJUSTMENT COMPONENTS

Two or three-way mixing valves are selected according to the consultants' calculations for the hot or cold coils' performances.

The valves are provided with a complete piping kit; the actuators are cabled to the control board by means of shielded cables.



## CONTROL SYSTEMS

The unit makes use of a microprocessor regulation with an optimised specific software configuration.

The user-friendly keyboard positioned on the unit provides remote control over all the devices and configuration modes.

# WIZARD

## One solution for any project



WIZARD air handling units are specially designed to cater to any installation needs. The range consists of 23 standard sizes, with air flow ranges varying from 1,000 to 115,500 m<sup>3</sup>/h, and face air speed through the coils of 2,5 m/s.

WIZARD can be combined with a wide range of accessories, making it the most suitable unit not only for standard applications but also for special ones.



Front air speed m/s

2 > 2,5 > 3 > 3,5

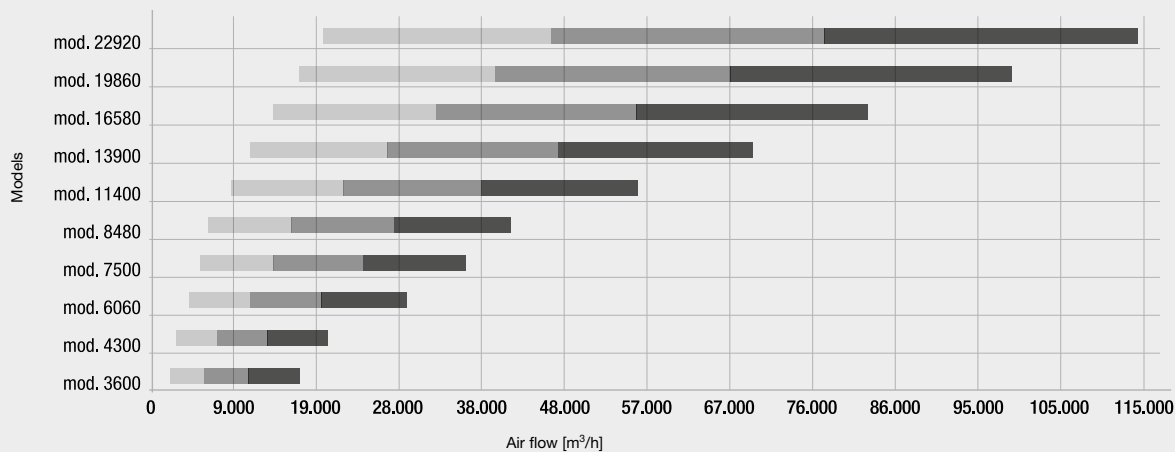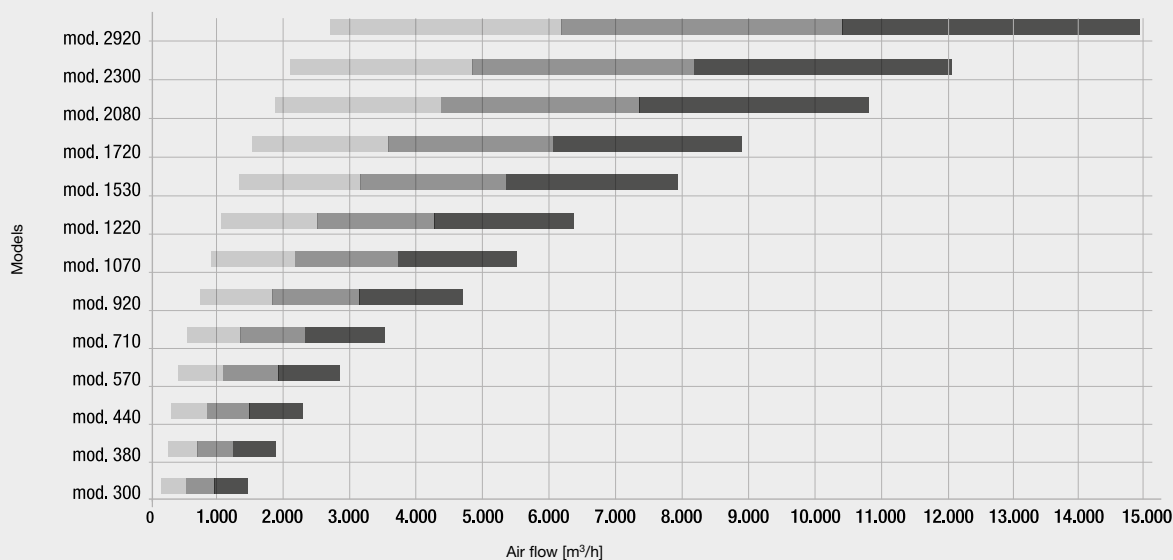

## CERTIFICATION

The WIZARD range complies with the strictest regulations, in order to provide a reliable answer to the requirements in air handling units. Reliability and quality are based on projects and references, together with technical expertise and compliance with regulations.



Air handling units comply with the fundamental regulations and EC directives and other guidelines such as:

- Machinery Directive 2006/42/EC
- EMC Directive 2014/30/EC
- RoHS Directive (As far as applicable) 2011/65/EU
- ErP Directive 2009/125/EC



# WIZARD Versions:

- ✓ **STANDARD UNIT.**
- ✓ **STANDARD UNIT WITH INTEGRATED CONTROL BOARD.**
- ✓ **UNIT WITH SINGLE INTAKE FAN.**
- ✓ **UNIT WITH SINGLE INTAKE FAN AND INTEGRATED CONTROL BOARD.**
- ✓ **UNIT WITH ROTARY RECUPERATOR.**
- ✓ **UNIT WITH ROTARY RECUPERATOR AND INTEGRATED CONTROL BOARD.**

## TECNICAL DATA

WIZARD		300	380	440	570	710	920	1070	1120
Air flow (Speed 1,5 m/s)	m <sup>3</sup> /h	650	810	970	1.130	1.400	1.700	2.200	2.650
Air flow (Speed 2 m/s)	m <sup>3</sup> /h	860	1.070	1.300	1.500	1.870	2.300	2.950	3.550
Air flow (Speed 2,5 m/s)	m <sup>3</sup> /h	1.080	1.340	1.620	1.880	2.330	2.850	3.650	4.450
Air flow (Speed 3 m/s)	m <sup>3</sup> /h	1.300	1.600	1.950	2.250	2.800	3.400	4.400	5.300

WIZARD		1530	1720	2080	2300	2920	3600	4300	6060
Air flow (Speed 1,5 m/s)	m <sup>3</sup> /h	3.200	4.200	4.900	5.600	6.300	7.800	9.300	12.500
Air flow (Speed 2 m/s)	m <sup>3</sup> /h	4.350	5.600	6.500	7.450	8.400	10.300	12.400	16.700
Air flow (Speed 2,5 m/s)	m <sup>3</sup> /h	5.450	7.000	8.200	9.300	10.500	12.900	15.600	20.900
Air flow (Speed 3 m/s)	m <sup>3</sup> /h	6.550	8.400	9.800	11.200	12.600	15.500	18.600	25.100

WIZARD		7500	8480	11400	13900	16580	19860	22920	26400
Air flow (Speed 1,5 m/s)	m <sup>3</sup> /h	15.600	18.100	21.400	26.400	32.200	38.000	46.500	57.000
Air flow (Speed 2 m/s)	m <sup>3</sup> /h	20.700	24.200	28.500	35.200	42.800	51.000	62.000	76.000
Air flow (Speed 2,5 m/s)	m <sup>3</sup> /h	25.900	30.300	35.600	44.900	53.500	64.000	77.500	95.000
Air flow (Speed 3 m/s)	m <sup>3</sup> /h	31.100	36.300	42.800	52.700	64.300	76.500	93.500	115.400

## THE WZ-E RANGE

The WZ-E units\* range are Eurovent certified according to the EN1886(M) and EN13053 regulations guaranteeing the quality of the units and accuracy in the declared performance data.

WZ-E	EUROVENT CLASS	EUROVENT-CERTIFICATED VALUES - EN1886(M)
Casing Strength	D1	Max relative bending: 4mm/m
Casing Air Leakage with Pressure Test -400 Pa	L1	Max leakage: 0,15 l/s m <sup>2</sup>
Casing Air Leakage with Pressure Test +700 Pa	L1	Max leakage: 0,22 l/s m <sup>2</sup>
Filter by-pass	F9	Total leakage K: 0,5%
Thermal transmittance U	T2	0,5 < U ≤ 1 W/K m <sup>2</sup>
Thermal bridging factor	TB2	0,6 < kb ≤ 0,75 W/K m

\* Box Model tested with 60mm thick profiles with thermal break and with 62mm thick polyurethane panels, internal sheet of galvanized steel and external sheet in galvanized preplated steel.

## The EN1886(M) specifies methods, test requirements and classifications for Air Handling Units that apply to the unit

The Standard covers the following structure aspects of the air treatment units:

- Mechanical strength of the structure
- Air leakage through the casing
- Air leakage through filters
- Thermal and acoustic performance of the casing

WIZARD Air Handling Units are designed and made in accordance with European regulations and directives of the CE mark, according to the highest Standards of quality and packaging. The performance data are certified according to the EUROVENT certification and TÜV laboratories (WZ-E range).

Check ongoing validity of certificate: [www.eurovent-certification.com](http://www.eurovent-certification.com)



# “BY FAR THE BEST PROOF IS EXPERIENCE”

**Sir Francis Bacon**  
British philosopher (1561 - 1626)



# AJACCIO HOSPITAL

2016-2018 Ajaccio, Corsica - France

**Application:**  
Healthcare / Hospitals

**Plant type:**  
Hydronic System - Air to Air System

**Cooling capacity:**  
4000 kW

**Air flow:**  
72000 M<sup>3</sup>/h

**Installed units:**  
4x i-FX-W (1+i) 3402, 640 fan coils, 83x WIZARD,  
16x ACU, ClimaPRO  
Certifications: HQE - Excellent

## PROJECT

Ajaccio Hospital, located on the east side of the city with a scenic view of the sea, has replaced the old one and has become the main medical centre for the whole island. With its 340 beds, the hospital offers all types of facilities for patient care, including the emergency room, radiology, general medicine, surgery with eight operating theaters, gynecology and obstetrics, intensive care, and cardio-vascular divisions.

## CHALLENGE

The Hospital was built in strict compliance with environmental and energy saving standards, according to the French certification HQE (Haute Qualité Environnementale).

## SOLUTION

In the new Ajaccio Hospital, 4 Climaveneta high efficiency water cooled chillers i-FX-W (1+i) 3402 for a total cooling capacity of about 4,000 kW were installed. For the air distribution in the hospital 640 fan coil units, belonging to a-LIFE and a-HWD2 ranges, were chosen, while the air treatment is provided by 60 Wizard air handling units. Moreover 23 AHUs have been installed as extractors. The supply contract also included 16 Accurate close control units, which are installed in the data center of the hospital. The whole HVAC system is managed by ClimaPRO.



# MORE THAN 1000 PROJECTS ALL OVER THE WORLD

## LAC PALACE

2017 Tunis - Tunisia

**Application:** Shopping centre

**Plant type:** Hydronic System

**Cooling capacity:** 120 kW

**Installed machines:** 1x NECS-N 0512T, 3x WIZARD



## BENTA

2017-2018 Dbayeh - Lebanon

**Application:** Office buildings

**Plant type:** Hydronic System - Air to Air System

**Cooling capacity:** 1406 kW

**Air flow:** 5500 m<sup>3</sup>/h

**Installed machines:** 1x i-FX/K/S 6022, 1x WIZARD



## ANGSANA CORFU

2017-2018 Corfu - Greece

**Application:** Hotels and Resorts

**Plant type:** Hydronic System - Air to Air System

**Cooling capacity:** 3188 kW

**Heating capacity:** 5028 kW

**Air flow:** 213545 m<sup>3</sup>/h

**Installed machines:** 4x ERACS2Q LN-CA 3222,  
3x EW-HT 0612, 31x WIZARD, ClimaPRO



Climaveneta brand air handling units, with their unbeatable advantages in terms of efficiency, quality, and reliability, are already the preferred choice in the most challenging and prestigious projects, all around the world.

### CHILDREN'S HOSPITAL SANTA SOPHIA

2017 Athens - Greece

**Period:** Hospital

**Application:** Healthcare / Hospitals

**Plant type:** Hydronic System - Air to Air System

**Cooling capacity:** 288 kW

**Air flow:** 10739 m<sup>3</sup>/h

**Installed machines:** 1x NX/K 1014P, 2x WIZARD



### STADE DE CHAYLA

2017 Beirut - Lebanon

**Period:** Hospital

**Application:** Healthcare / Hospitals

**Plant type:** Hydronic System

**Cooling capacity:** 1328 kW

**Installed machines:** 2x NECS-B/2418; 38x WIZARD



### PICCINNI THEATRE

2010-2019 Bari - Italy

**Application:** Theatres

**Plant type:** Hydronic System - Air to Air System

**Cooling capacity:** 215 kW

**Heating capacity:** 237 kW

**Air flow:** 15700 m<sup>3</sup>/h

**Installed machines:** 1x NX-N/D/SL-CA 0804T;  
1 xWIZARD-1530; 1 xWIZARD-2300; 1x WIZARD-4300





for a greener tomorrow

Eco Changes is the Mitsubishi Electric Group's environmental statement, and expresses the Group's stance on environmental management. Through a wide range of businesses, we are helping contribute to the realization of a sustainable society.



## MITSUBISHI ELECTRIC HYDRONICS & IT COOLING SYSTEMS S.p.A.

Head Office: Via Sarson 57/c - 36061 Bassano del Grappa (VI) - Italy

Tel (+39) 0424 509 500 - Fax (+39) 0424 509 509

[www.climaveneta.com](http://www.climaveneta.com)

[www.melcohit.com](http://www.melcohit.com)



MIX  
Paper from  
responsible sources  
FSC® C133396