

# MITSUBISHI ELECTRIC HYDRONICS & IT COOLING SYSTEMS S.p.A.

PROCESS

ROOFTOP UNITS

## WSM2-Y

**AIR COOLED ROOFTOP UNITS,  
COOLING CAPACITY FROM 15,8 TO 182 kW,  
AIRFLOW FROM 2500 TO 30500 m<sup>3</sup>/h**



# WSM2-Y

## HIGHEST QUALITY IN EACH SINGLE DETAIL

### REVERSIBLE AND COOLING ONLY AIR COOLED ROOFTOP UNIT. COOLING POWER FROM 15,8 TO 182 kW.

WSM2-Y is an autonomous rooftop unit dedicated to the air handling and air renewal in process applications. Thanks to two different layouts and a cooling range from 15,8 to 182 kW, the new range meets the requirements of both small volume spaces and big industries.

The Micro and Mini WSM2-Y ranges from 15,8 and 46,7 kW are equipped with a single cooling circuit, scroll compressors optimized for the R410A refrigerant, and EC plug fans.

Bigger WSM2-Y (81-182 kW) features double cooling circuit and is dedicated to larger volume areas.

All the versions are characterized by a high flexibility in choosing the airflow direction and different functions to best fit plant requests. Perfect insulation is possible thanks to sandwich structure and high seasonal efficiency is achieved through top quality and generously sized components.



### IDEAL APPLICATIONS:

- ▶ Warehouse
- ▶ Automotive Industry
- ▶ Electric equipment cooling
- ▶ Plastic industry

### VERSIONS:

**WSM2-Y:** Reversible heat pump

**WSM2-T-Y:** Cooling only

### FUNCTIONS:

|             |                                                                      | MICRO<br>(0052-0092) | MINI<br>(0102-0152) | STANDARD<br>(0264-0604) |
|-------------|----------------------------------------------------------------------|----------------------|---------------------|-------------------------|
| <b>AR</b>   | Air Recirculation (Baseline)                                         | ✓                    | ✓                   | ✓                       |
| <b>MF</b>   | Air mixing and free cooling                                          | ✓                    | ✓                   | ✓                       |
| <b>AX</b>   | Air mixing and axial fan extraction                                  |                      |                     | ✓                       |
| <b>AX-F</b> | Air mixing and axial fan extraction with thermodynamic heat recovery | ✓                    | ✓                   |                         |
| <b>CE</b>   | Air mixing and plug fans extraction                                  |                      | ✓                   | ✓                       |
| <b>HR-B</b> | Heat recovery with Refrigerant Booster                               |                      | ✓                   | ✓                       |
| <b>HR-P</b> | Heat recovery with cross-flow heat exchanger (High and low flow)     |                      |                     | ✓                       |
| <b>HR-E</b> | Heat recovery with rotary enthalpy wheel                             |                      | ✓                   | ✓                       |

### MAXIMUM ENERGY EFFICIENCY IN ALL APPLICATIONS

Available in eight different configurations and four different heat recovery technologies, WSM2-Y has been engineered for maximum efficiency in any situation.

As standard, WSM2-Y features plug fans with built-in EC motor, electronic expansion valves and the latest generation axial fans.

All units are designed to meet the seasonal efficiency standards (SEER & SCOP) established by the EU 2016/2281 regulation, Second Tier (ErP 2021).



**High flexibility in the airflow direction, premium efficiency and reliability, together with a special attention to technical details.**  
**This is the result of the new WSM2-Y versatile range featuring seven operational types and three different heat recovery technologies.**


#### ► HIGHLY UNIT VERSATILITY



WSM2-Y is a modular and configurable solution that has been wisely engineered to fit precise size requirements.

WSM2-Y is available in both heat pump and cooling only versions, while the base module features eight different functions. Additionally, a wide range of accessories dedicated to the air handling range allow the unit to operate optimally in any condition.

#### ► TOTAL SYSTEM RELIABILITY

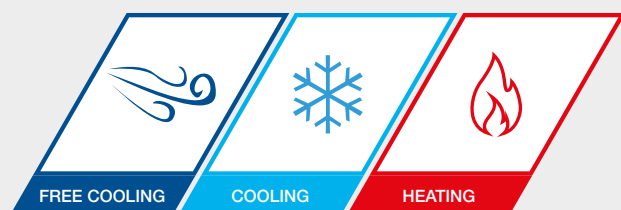


WSM2-Y manages additional resources for heating and air handling in a completely independent way.

Thanks to its free cooling mode, the unit utilizes the favorable external conditions to condition the environment without switching on the compressors.

Units are always supplied with independent cooling circuits.

#### ► TIDY AND WELL INSULATED STRUCTURE

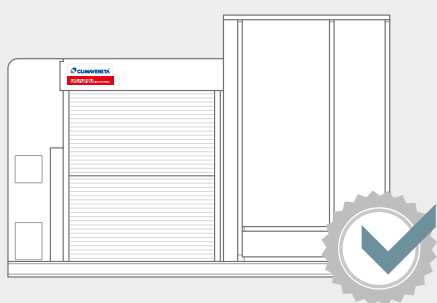

WSM2-Y features air treatment section made up of a sandwich panel with polyurethane core and rubber gaskets, fixed with special hinges that best ensure thermal insulation, increasing overall efficiency of the unit.

All cables and pipes are housed in compartments different from those of the air treatment, so the structure is nice and clean.

#### ► FLEXIBLE AIR FLOW MANAGEMENT



Complete access to the unit's functions via the controller, with ability to set the various operational parameters safely - in particular the supply and return air flow rates with associated head values. This is correlated to the available choice of multiple strategies for both air flows and resources' regulation.

Compact dimensions, compared to traditional rooftops of same capacity, especially if heat recovery is featured. This gives significant savings in transporting, handling, lifting and positioning the rooftop on-site. Easy and safe access to internal sections and devices, for fast and simple routine maintenance.

# TECHNOLOGICAL CHOICES

**Quality of each single detail and premium technological choices: these are the distinguishing traits of WSM2-Y.**

## AIR3000TE CONTROL

The core of the WSM2-Y management is the evolved AIR3000TE control, specifically designed for Climaveneta rooftop units.

Besides the cooling circuit management there is the air handling control, and both of these functions allow the WSM2-Y unit to work in a completely autonomous way.



## EASY ACCESS TO COMPONENTS

All panels are easily removable to access indoor components.

The cutting-edge hinge used on WSM2-Y allows any door to open from the left, from the right, or be completely removed.



## ELECTRONIC THERMOSTATIC VALVE

The electronic expansion valve, which comes as standard in all versions, provides great benefits with variable loads and varying external weather conditions.

Its introduction is in line with the accurate design of the cooling circuit and its efficient operation in multiple operating conditions.





## OPERATING RANGE AND LIMITS

The WSM2-Y range consists of 16 sizes, from 15,8 to 46,7 kW and from 81,1 to 182 kW of cooling capacity and airflow rate from 2500 to 9500 m³/h and from 13500 to 30500 m³/h.

Thanks to the wide and generous dimensions of the treatment

coils, together with the smart design of the cooling circuit, WSM2-Y units also boast an extended outdoor temperature operating range: from -15°C when the unit is working in heat pump operation, to +46°C in cooling mode. Moreover, thanks to HPTC function, the unit can work in partial load mode (50% capacity) up to 52°C.

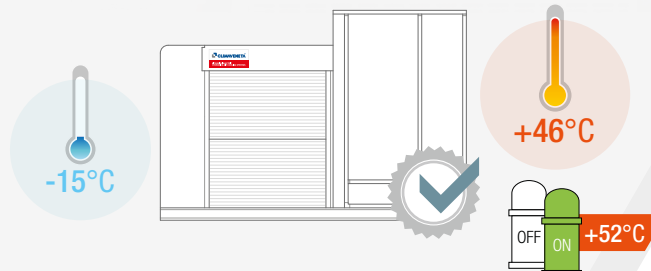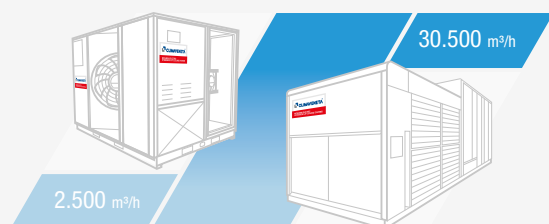




Because the excellence of a product, according to Climaveneta brand philosophy, starts with the best quality of each single technical component, in both the design and installation phases.

## CASING

WSM2-Y structure rests on galvanized and painted steel beams. The condensing side is constituted with a self-supporting frame made from suitably thick hot galvanized steel section.

The air treatment section is made up of sandwich panels 25/42 mm thick with rubber gaskets and polyurethane core, fixed with special hinges that best ensure thermal insulation and air tightness.

Panels are supported by an aluminium alloy frame to increase sturdiness and lightness of the unit.

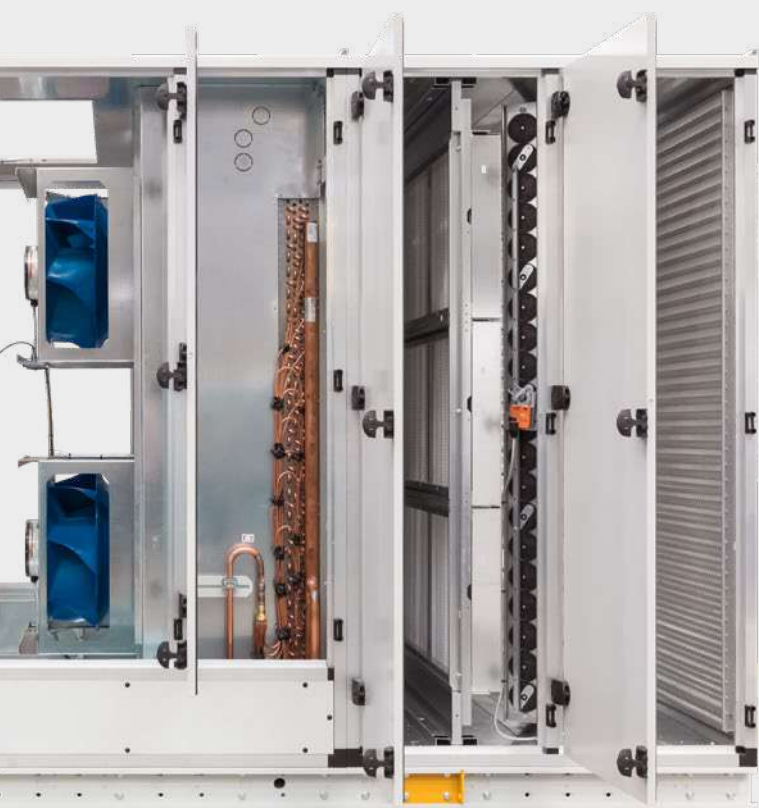

## EC PLUG FANS

The WSM2-Y units are equipped with radial plug fans with an EC incorporated motor.



The fan speed can be regulated by keeping both the airflow or the external static pressure constant or by selecting the variable airflow through the Vair function.



## ACCESSORIES

A wide range of accessories completes the air treatment and allows the unit to optimally manage its operation.



Steam humidifier



High efficiency filters (up to ePM01 85% - F9) or electronic in addition to the standard class isocoarse 50% (G4) filters



BMS connection



Control function for the air handling section



Air quality control with CO<sub>2</sub> probes



Heating coils, electrical heater, hot gas coil



Axial EC fan, to enhance efficiency. It comes as standard with Micro and Mini WSM2-Y

# WSM2-Y

## HEAT RECOVERY TECHNOLOGIES

Four heat recovery technologies designed to precisely and reliably transfer the energy contained in the exhaust air to the refrigerant circuit, thus increasing the unit's overall efficiency.


### AX-F

#### THERMODYNAMIC HEAT RECOVERY

FOR MICRO AND MINI WSM2-Y

Thermodynamic heat transfer is achieved by deviating the exhaust air through the outdoor section of the refrigerant circuit.

This increases efficiency by allowing the unit to work at a more advantageous condensing temperature than allowed by the outside conditions.

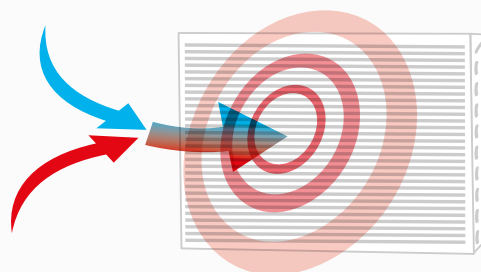

Smart and functional design



Advantageous average temperature on the outdoor coil



No additional pressure drops


### HR-B

#### REFRIGERANT BOOSTER

The WSM2-Y HR-B units are fitted with the exclusive Refrigerant Booster heat recovery system, which promptly and fully recovers heat from the exhaust air.

This recovered energy is transferred to the refrigerant circuit, which increases the capacity of the air handling coil while reducing the power absorbed by the compressor.

The recovery system, made of a finned coil installed at the air exhaust damper, takes advantage of the favourable conditions of the exhaust air, both during summer and winter operation.

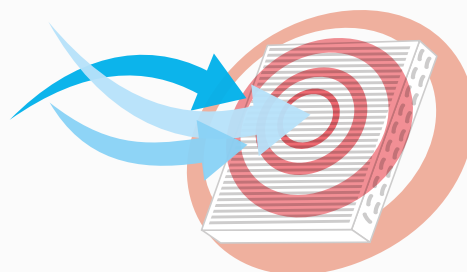

Quantifiable benefits



Compact footprint of the recovery system



Ideal for Mediterranean climate

## TYPES OF HEAT RECOVERY





|                           |       |            |             |             |             |
|---------------------------|-------|------------|-------------|-------------|-------------|
| Cooling capacity increase | % (1) | <b>+2%</b> | <b>+12%</b> | <b>+10%</b> | <b>+45%</b> |
| Thermal capacity increase | % (2) | <b>+6%</b> | <b>+11%</b> | <b>+22%</b> | <b>+39%</b> |

- 1 ▶ Average percentage values refer to WSM2-Y/MF version (no heat recovery).  
Standard conditions for cooling: Outdoor 35°C 50% R.H. / Indoor 27°C 47% R.H. / Mix 50% - Nominal air flow.
- 2 ▶ Average percentage values refer to WSM2-Y/MF version (no heat recovery).  
Standard conditions for heating: Outdoor 7°C 87% R.H. / Indoor 20°C 50% R.H. / Mix 50% - Nominal air flow.

## HR-P CROSS-FLOW HEAT RECOVERY

The WSM2-Y HR-P units feature the cross-flow heat recovery, which transfers the thermal energy contained in the exhaust air to the fresh airflow. The plate heat recovery system extends the operating limits of the unit, allowing it to work with higher flow rates of external air.

The units are equipped with by-pass dampers for free-cooling operation, to reduce system pressure drops and not-advantageous heat exchange between fresh and exhaust air flow.

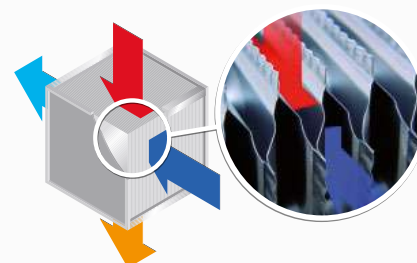

Complete airflow separation



High operating reliability and safety




Quick and easy cleaning and maintenance


## HR-E HEAT RECOVERY WITH ROTARY ENTHALPY WHEEL

The most efficient heat recovery technology in terms of efficiency is the rotary enthalpic recovery, which efficiency can reach up to 85%.

The key component is the enthalpic wheel which is made with alternately flat and wavy sheets treated with hygroscopic coating. Due to the large exchange surface compared to its volume, it ensures the recovery of latent and sensible heat, with a significant increase in the unit overall capacity.



Summer mode




Winter mode



Latent heat recovery



Cooling capacity recovered



Quick return on the investment

# WSM2-Y FUNCTIONS

**WSM2-Y is available in 8 configurations to easily fit a modern HVAC design**



## AR Function

Unit function for the total recovery. Ideal in those applications where the air renewal and the exhaust air extraction are not managed by the rooftop unit.


This unit perfectly substitutes old products in pre-existing HVAC plants which already have a system dedicated to air renewal.



Micro WSM2-Y



Mini WSM2-Y



WSM2-Y



## MF Function

The MF function allows the recirculated ambient air to be mixed with some fresh outside air. Free cooling operation is managed by the controller, which automatically opens the dampers according to the indoor and outdoor temperatures,


and the set point. This function is ideal in refurbished buildings with low air tightening, to be coupled with already existing air extraction systems which need to be used to balance pressure inside the building.



Micro WSM2-Y



Mini WSM2-Y




WSM2-Y



## AX Function

Like the MF function, the AX function allows the unit to mix the recirculated ambient air with some fresh outdoor air. The unit is equipped with one or more axial fans in order to ensure exhaust air rejection.

Thanks to these fans, AX is ideal in all commercial applications, such as gas stations where a compact and autonomous solution is required.



WSM2-Y




## AX-F Function

As the AX function, this function has one or more fans to ensure exhaust air rejection. This particular unit can recover the energy from the exhaust air flow, thanks to the pass through the outdoor coil. In this way, the air facing to the

outdoor coil is milder than the surrounding one, granting a better working conditions to the cooling circuit (decreasing of the condensing temperature in cooling mode and increasing the evaporating temperature in heating mode).



Micro WSM2-Y



Mini WSM2-Y



 Return air flow
  Supply air flow
  Fresh air flow
  Exhaust air flow






## CE Function

Unit with three dampers for unit operation in different modes: 100% recirculated air, air mixing, air extraction /expulsion.

Thanks to EC plug fan on return air flow, this unit is able to accurately control the pressure in the air-conditioned rooms.

Moreover the unit is able to work in free cooling mode up to 100%.

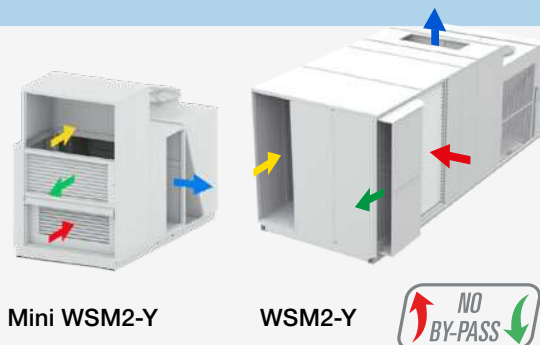

Mini WSM2-Y

WSM2-Y




## HR-B Function

Unit with three motorized dampers and Refrigerant Booster heat recovery. The unit ensures the treatment, renovation, and air extraction in a completely autonomous way. At the same time, the HR-B function rejects excess air and ensures free cooling mode.

Thanks to the Refrigerant Booster recovery, the WSM2-Y HR-B unit promptly and fully recovers the thermal heat of the exhaust air, transferring this energy to the cooling circuit which increases its capacity.

Moreover the unit is able to work in free cooling mode up to 100%.

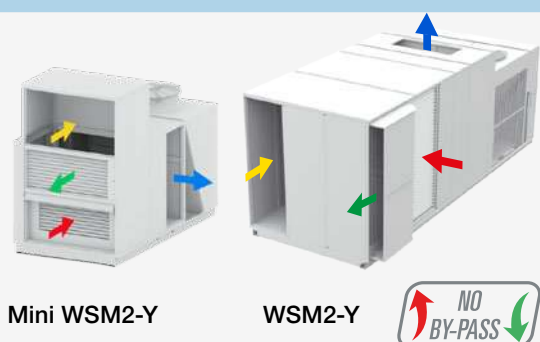

Mini WSM2-Y


WSM2-Y



## HR-P Low Flow and High Flow Function

The HR-P function is the ideal solution for an extreme climate with very hot, or alternatively, very cold conditions. Thanks to the cross-flow heat recovery the unit transfers the thermal energy contained in the exhaust air to the fresh air. The unit is equipped with three motorized dampers for the unit operation in total recirculated mode, 0-100% free cooling, air extraction /expulsion.

There are two PHE available: low flow, whenever a little fresh air is required, while high flow is recommended when a lot of fresh air is required.




WSM2-Y



## HR-E Function

The HR-E function employs the enthalpy heat recovery to exchange latent and sensible heat between the fresh outside air and exhaust air. The unit is equipped with three motorized dampers for the unit operation in total recirculated mode, 0-100% free cooling, and air extraction/expulsion.

Thanks to special hoods, the contamination between the renewal and exhaust air is reduced to a minimum.

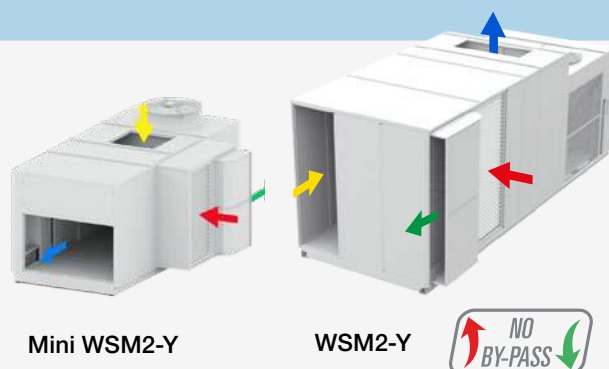

Mini WSM2-Y

WSM2-Y



# MICRO & MINI WSM2-Y

## 0052 - 0152

Air source reversible and cooling only rooftop unit (from 15,8 to 46,7 kW)



| WSM2-Y AR/MF                                                     |         |         | 0052     | 0062     | 0082     | 0092     | 0102     | 0122     | 0132     | 0152     |
|------------------------------------------------------------------|---------|---------|----------|----------|----------|----------|----------|----------|----------|----------|
| Power supply                                                     |         | V/ph/Hz | 400/3/50 | 400/3/50 | 400/3/50 | 400/3/50 | 400/3/50 | 400/3/50 | 400/3/50 | 400/3/50 |
| <b>COOLING WSM2/WSM2-T-Y GROSS VALUE</b>                         |         |         |          |          |          |          |          |          |          |          |
| Total cooling capacity                                           | (1)     | kW      | 15,8     | 18,0     | 20,9     | 27,4     | 33,2     | 37,3     | 42,9     | 46,7     |
| Total sensible capacity                                          | (1)     | kW      | 11,8     | 14,2     | 16,9     | 22,0     | 28,6     | 32,5     | 37,3     | 40,8     |
| Compressors power input                                          | (1)     | kW      | 4,06     | 4,97     | 5,77     | 7,65     | 8,00     | 10,0     | 11,7     | 12,8     |
| EER (total)                                                      | (1)(12) | kW/kW   | 3,3      | 3,0      | 3,0      | 2,7      | 3,1      | 2,9      | 2,8      | 2,9      |
| <b>COOLING WSM2-Y (EN14511 VALUE)</b>                            |         |         |          |          |          |          |          |          |          |          |
| Cooling capacity                                                 | (1)(3)  | kW      | 15,8     | 18,1     | 21,0     | 27,6     | 33,7     | 37,9     | 43,5     | 47,7     |
| EER                                                              | (1)(3)  | kW/kW   | 3,48     | 3,22     | 3,20     | 2,87     | 3,42     | 3,16     | 3,08     | 3,18     |
| Cooling energy class                                             |         |         | A        | A        | A        | B        | A        | A        | A        | A        |
| <b>HEATING WSM2-Y (GROSS VALUE)</b>                              |         |         |          |          |          |          |          |          |          |          |
| Total heating capacity                                           | (2)     | kW      | 16,1     | 18,9     | 22,2     | 27,7     | 32,5     | 36,9     | 41,8     | 46,7     |
| Compressors power input                                          | (2)     | kW      | 4,34     | 4,67     | 5,20     | 7,13     | 7,04     | 8,09     | 9,04     | 10,1     |
| COP (total)                                                      | (2)(12) | kW/kW   | 3,3      | 3,3      | 3,5      | 3,0      | 3,3      | 3,3      | 3,4      | 3,5      |
| <b>HEATING ONLY WSM2-Y (EN14511 VALUE)</b>                       |         |         |          |          |          |          |          |          |          |          |
| Total heating capacity                                           | (2)(3)  | kW      | 16,1     | 18,9     | 22,1     | 27,6     | 32,0     | 36,3     | 41,1     | 45,7     |
| COP                                                              | (2)(3)  | kW/kW   | 3,42     | 3,55     | 3,71     | 3,10     | 3,48     | 3,50     | 3,58     | 3,72     |
| Heating energy class                                             |         |         | A        | A        | A        | C        | A        | A        | A        | A        |
| <b>SEASONAL EFFICIENCY IN COOLING WSM2-Y (Reg. EU 2016/2281)</b> |         |         |          |          |          |          |          |          |          |          |
| <b>Ambient refrigeration</b>                                     |         |         |          |          |          |          |          |          |          |          |
| Prated,c                                                         | (7)     | kW      | 15,8     | 18,1     | 21,0     | 27,6     | 33,7     | 37,9     | 43,5     | 47,7     |
| SEER                                                             | (7)(8)  |         | 4,46     | 4,19     | 4,34     | 4,07     | 4,89     | 4,33     | 4,14     | 4,27     |
| Performance ηs                                                   | (7)(9)  | %       | 175,4    | 164,6    | 170,6    | 159,8    | 192,6    | 170,2    | 162,6    | 167,8    |
| <b>SEASONAL EFFICIENCY IN HEATING WSM2-Y (Reg. EU 2016/2281)</b> |         |         |          |          |          |          |          |          |          |          |
| <b>Ambient heating</b>                                           |         |         |          |          |          |          |          |          |          |          |
| PDesign                                                          | (7)     | kW      | 13,0     | 15,4     | 17,8     | 22,6     | 24,6     | 28,1     | 31,7     | 35,2     |
| SCOP                                                             | (7)(8)  |         | 3,63     | 3,53     | 3,59     | 3,52     | 3,69     | 3,68     | 3,64     | 3,68     |
| Performance ηs                                                   | (7)(10) | %       | 142,2    | 138,2    | 140,6    | 137,8    | 144,6    | 144,2    | 142,6    | 144,2    |
| <b>SUPPLY FANS (WSM2-Y)</b>                                      |         |         |          |          |          |          |          |          |          |          |
| Air flow rate                                                    |         | m³/h    | 2500     | 3500     | 4500     | 5500     | 6300     | 7300     | 8400     | 9500     |
| Nominal ESP                                                      | (4)     | Pa      | 50       | 50       | 62       | 62       | 150      | 150      | 150      | 200      |
| Total power input                                                | (12)    | kW      | 0,44     | 0,81     | 0,95     | 1,33     | 1,09     | 1,31     | 1,67     | 1,69     |
| <b>REFRIGERANT CIRCUIT</b>                                       |         |         |          |          |          |          |          |          |          |          |
| No. Compressors/No. Circuits                                     |         | N°      | 2/1      | 2/1      | 2/1      | 2/1      | 2/1      | 2/1      | 2/1      | 2/1      |
| Refrigerant charge                                               | (6)(11) | kg      | 2,0      | 3,0      | 4,0      | 5,0      | 8,0      | 8,5      | 9,0      | 9,5      |
| <b>NOISE LEVEL</b>                                               |         |         |          |          |          |          |          |          |          |          |
| Sound power level in cooling mode                                | (5)     | dB(A)   | 76       | 79       | 78       | 80       | 79       | 79       | 83       | 83       |
| Sound Power on outlet side                                       | (5)     | dB(A)   | 76       | 84       | 79       | 84       | 77       | 81       | 86       | 82       |
| <b>SIZE</b>                                                      |         |         |          |          |          |          |          |          |          |          |
| <b>Function AR</b>                                               |         |         |          |          |          |          |          |          |          |          |
| Length A                                                         | (6)     | mm      | 2055     | 2055     | 2055     | 2055     | 2000     | 2000     | 2000     | 2000     |
| Width B                                                          | (6)     | mm      | 1300     | 1300     | 1300     | 1300     | 1600     | 1600     | 1600     | 1600     |
| Height H                                                         | (6)     | mm      | 1640     | 1640     | 1640     | 1640     | 1837     | 1837     | 1837     | 1837     |
| Operating weight                                                 | (6)(13) | kg      | 520      | 540      | 570      | 590      | 700      | 730      | 730      | 740      |
| <b>Function MF</b>                                               |         |         |          |          |          |          |          |          |          |          |
| Length                                                           |         | mm      | 2430     | 2430     | 2430     | 2430     | 2380     | 2380     | 2380     | 2380     |
| Width                                                            |         | mm      | 1355     | 1355     | 1355     | 1355     | 1600     | 1600     | 1600     | 1600     |
| Height                                                           |         | mm      | 1640     | 1640     | 1640     | 1640     | 1837     | 1837     | 1837     | 1837     |
| Operating weight                                                 | (13)    | kg      | 550      | 570      | 600      | 620      | 760      | 790      | 790      | 800      |

### Notes:

- 1 Cooling: Outdoor 35°C 50% R.H. / Indoor 27°C 47% R.H. / Mix 0%.
- 2 Heating: Outdoor 7°C 87% R.H. / Indoor 20°C 50% R.H. / Mix 0%.
- 3 Values in compliance with EN14511
- 4 ESP for standard configuration (optional accessories not included/calculated).
- 5 Sound power on the basis of measurements made in compliance with ISO 9614.
- 6 Unit in AR configuration
- 7 Parameter calculated according to [REGULATION (EU) N. 2016/2281]
- 8 Seasonal energy efficiency ratio

### 9 Seasonal space cooling energy efficiency

10 Seasonal energy efficiency of the heating environment in AVERAGE climatic conditions [REGULATION (EU) N. 2016/2281]

11 The gas charge is obtained from a theoretical calculation and may differ from the real one present in the unit and shown on the plate.

12 Available static pressure 250Pa (pressure drop resulting from any available accessories not included).

13 The weight shown refers to the unit in the heat pump version, including any batteries and accessory filters. Any additional modules are not considered.

**Certified data in EUROVENT\***

\* Eurovent certified data here reported refer to WSM2-Y reverse cycle unit. For WSM2-T-Y data please refer to the data book or Elca World. Check ongoing validity of certificate and data update on: [www.eurovent-certification.com](http://www.eurovent-certification.com)



| WSM2-Y AX-F                                 |     |         | 0052     | 0062     | 0082     | 0092     | 0102     | 0122     | 0132     | 0152     |
|---------------------------------------------|-----|---------|----------|----------|----------|----------|----------|----------|----------|----------|
| Power supply                                |     | V/ph/Hz | 400/3/50 | 400/3/50 | 400/3/50 | 400/3/50 | 400/3/50 | 400/3/50 | 400/3/50 | 400/3/50 |
| <b>COOLING WSM2-YWSM2-T-Y (GROSS VALUE)</b> |     |         |          |          |          |          |          |          |          |          |
| Total cooling capacity                      | (1) | kW      | 17,2     | 19,6     | 22,7     | 29,9     | 36,2     | 40,6     | 46,7     | 50,9     |
| Total sensible capacity                     | (1) | kW      | 12,0     | 14,4     | 17,3     | 22,3     | 29,6     | 33,6     | 38,6     | 42,2     |
| Total absorbed power                        | (1) | kW      | 4,9      | 6,2      | 7,3      | 10,4     | 10,8     | 13,2     | 15,6     | 16,7     |
| EER (total)                                 | (1) |         | 3,50     | 3,20     | 3,10     | 2,90     | 3,35     | 3,08     | 2,99     | 3,05     |
| <b>HEATING WSM2-Y (GROSS VALUE)</b>         |     |         |          |          |          |          |          |          |          |          |
| Total heating capacity                      | (2) | kW      | 16,3     | 19,5     | 22,9     | 28,7     | 33,7     | 37,7     | 42,9     | 49,1     |
| Total absorbed power                        | (2) | kW      | 5,13     | 5,45     | 6,3      | 9,14     | 9,62     | 10,9     | 12,1     | 13,3     |
| COP (total)                                 | (2) |         | 3,20     | 3,60     | 3,60     | 3,10     | 3,50     | 3,46     | 3,55     | 3,69     |
| <b>SUPPLY FAN</b>                           |     |         |          |          |          |          |          |          |          |          |
| Quantity                                    |     |         | 1        | 1        | 1        | 1        | 1        | 1        | 1        | 1        |
| Air flow rate                               |     | m³/h    | 2500     | 3500     | 4500     | 5500     | 6300     | 7300     | 8400     | 9500     |
| Nominal AESP                                | (3) | Pa      | 250      | 250      | 250      | 250      | 250      | 250      | 250      | 250      |
| <b>EXHAUST FAN</b>                          |     |         |          |          |          |          |          |          |          |          |
| Quantity                                    |     |         | 1        | 1        | 1        | 1        | 1        | 1        | 1        | 1        |
| Air flow rate                               |     | m³/h    | 875      | 1225     | 1575     | 1925     | 2205     | 2555     | 2940     | 3325     |
| Nominal AESP                                | (3) | Pa      | 370      | 370      | 370      | 370      | 123      | 145      | 160      | 164      |
| <b>REFRIGERANT CIRCUIT</b>                  |     |         |          |          |          |          |          |          |          |          |
| N. compressors/ N. circuits                 |     |         | 2 / 1    | 2 / 1    | 2 / 1    | 2 / 1    | 2 / 1    | 2 / 1    | 2 / 1    | 2 / 1    |
| Refrigerant charge                          | (7) | kg      | 2        | 3        | 4        | 5        | 8        | 9        | 9        | 10       |
| <b>NOISE LEVEL</b>                          |     |         |          |          |          |          |          |          |          |          |
| Unit sound power level - COOLING ONLY       | (4) | dB(A)   | 81       | 82       | 82       | 84       | 81       | 83       | 86       | 87       |
| Unit sound power level - HEATING ONLY       | (4) | dB(A)   | 81       | 82       | 82       | 84       | 82       | 84       | 87       | 88       |
| <b>SIZE</b>                                 |     |         |          |          |          |          |          |          |          |          |
| Length A                                    |     | mm      | 2000     | 2000     | 2000     | 2000     | 2670     | 2670     | 2670     | 2670     |
| Width B                                     | (6) | mm      | 1755     | 1755     | 1755     | 1755     | 1600     | 1600     | 1600     | 1600     |
| Height H                                    |     | mm      | 1595     | 1595     | 1595     | 1595     | 1837     | 1837     | 1837     | 1837     |
| Operating weight                            | (5) | kg      | 570      | 590      | 610      | 630      | 830      | 860      | 860      | 870      |

**Notes:**

1 Cooling: Outdoor 35°C 50% R.H. / Indoor 27°C 47% R.H. / Mix 35%

2 Heating: Outdoor 7°C 87% R.H. / Indoor 20°C 50% R.H. / Mix 35%.

3 ESP for standard configuration (optional accessories not included/calculated).

4 Sound power on the basis of measurements made in compliance with ISO 3744.

For complete sound data consult Elca World.

5 The weight shown refers to the unit in the heat pump version, including any batteries and accessory filters.

Any additional modules are not considered.

6 The dimension does not include hoods and the thickness of the pre-filter for fresh air if present.

7 The refrigerant charge is the result of a theoretical calculation and could be different from the actual amount of refrigerant which is charged in the unit and on the label<sup>6</sup>The units highlighted in this publication contain HFC R410A [GWP<sub>100</sub> 2088] fluorinated greenhouse gases.

# MICRO & MINI WSM<sup>2</sup>-Y

## 0052 - 0152

Air source reversible and cooling only rooftop unit (from 15,8 to 46,7 kW)



| WSM2-Y CE                                    |     |         | 0102     | 0122     | 0132     | 0152     |
|----------------------------------------------|-----|---------|----------|----------|----------|----------|
| Power supply                                 |     | V/ph/Hz | 400/3/50 | 400/3/50 | 400/3/50 | 400/3/50 |
| <b>COOLING WSM2-Y/WSM2-T-Y (GROSS VALUE)</b> |     |         |          |          |          |          |
| Total cooling capacity                       | (1) | kW      | 35,6     | 39,8     | 45,8     | 49,7     |
| Total sensible capacity                      | (1) | kW      | 29,4     | 33,3     | 38,2     | 41,7     |
| Total absorbed power                         | (1) | kW      | 10,6     | 13,0     | 15,3     | 16,4     |
| EER (TOTAL)                                  | (1) |         | 3,36     | 3,06     | 2,99     | 3,03     |
| <b>HEATING WSM2-Y (GROSS VALUE)</b>          |     |         |          |          |          |          |
| Total heating capacity                       | (2) | kW      | 32,9     | 36,8     | 41,7     | 47,3     |
| TOTAL ABSORBED POWER                         | (2) | KW      | 9,36     | 10,5     | 11,7     | 12,7     |
| COP (total)                                  | (2) |         | 3,51     | 3,50     | 3,56     | 3,72     |
| <b>SUPPLY FAN</b>                            |     |         |          |          |          |          |
| Quantity                                     |     |         | 1        | 1        | 1        | 1        |
| AIR FLOW RATE                                |     | M³/H    | 6300     | 7300     | 8400     | 9500     |
| Nominal AESP                                 | (3) | Pa      | 250      | 250      | 250      | 250      |
| <b>RETURN FAN</b>                            |     |         |          |          |          |          |
| Quantity                                     |     |         | 1        | 1        | 1        | 1        |
| AIR FLOW RATE                                |     | M³/H    | 6300     | 7300     | 8400     | 9500     |
| Nominal AESP                                 | (3) | Pa      | 250      | 250      | 250      | 250      |
| <b>COMPRESSORS</b>                           |     |         |          |          |          |          |
| N. COMPRESSORS/ N. CIRCUITS                  |     |         | 2 / 1    | 2 / 1    | 2 / 1    | 2 / 1    |
| Refrigerant charge                           | (7) | kg      | 8        | 9        | 9        | 10       |
| <b>NOISE LEVEL</b>                           |     |         |          |          |          |          |
| Unit sound power level - COOLING ONLY        | (4) | dB(A)   | 80       | 81       | 85       | 85       |
| Unit sound power level - HEATING ONLY        | (4) | dB(A)   | 79       | 79       | 83       | 83       |
| <b>SIZE</b>                                  |     |         |          |          |          |          |
| Length A                                     |     | mm      | 2960     | 2960     | 2960     | 2960     |
| Width B                                      | (6) | mm      | 1600     | 1600     | 1600     | 1600     |
| Height H                                     |     | mm      | 2396     | 2396     | 2396     | 2396     |
| Operating weight                             | (5) | kg      | 1040     | 1070     | 1070     | 1090     |

| Function HR-B                                     |     |         | 0102     | 0122     | 0132     | 0152     |
|---------------------------------------------------|-----|---------|----------|----------|----------|----------|
| Power supply                                      |     | V/ph/Hz | 400/3/50 | 400/3/50 | 400/3/50 | 400/3/50 |
| <b>COOLING ONLY WSM2-Y/WSM2-T-Y (GROSS VALUE)</b> |     |         |          |          |          |          |
| Total cooling capacity                            | (1) | kW      | 35,6     | 39,8     | 45,8     | 49,7     |
| Total sensible capacity                           | (1) | kW      | 29,4     | 33,3     | 38,2     | 41,7     |
| Total absorbed power                              | (1) | kW      | 10,6     | 13,0     | 15,3     | 16,4     |
| EER (TOTAL)                                       | (1) |         | 3,36     | 3,06     | 2,99     | 3,03     |
| <b>HEATING WSM2-Y (GROSS VALUE)</b>               |     |         |          |          |          |          |
| Total heating capacity                            | (2) | kW      | 32,9     | 36,8     | 41,7     | 47,3     |
| TOTAL ABSORBED POWER                              | (2) | KW      | 9,36     | 10,5     | 11,7     | 12,7     |
| COP (total)                                       | (2) |         | 3,51     | 3,50     | 3,56     | 3,72     |
| <b>SUPPLY FAN</b>                                 |     |         |          |          |          |          |
| Quantity                                          |     |         | 1        | 1        | 1        | 1        |
| AIR FLOW RATE                                     |     | M³/H    | 6300     | 7300     | 8400     | 9500     |
| Nominal AESP                                      | (3) | Pa      | 250      | 250      | 250      | 250      |
| <b>RETURN FAN</b>                                 |     |         |          |          |          |          |
| Quantity                                          |     |         | 1        | 1        | 1        | 1        |
| AIR FLOW RATE                                     |     | M³/H    | 6300     | 7300     | 8400     | 9500     |
| Nominal AESP                                      | (3) | Pa      | 250      | 250      | 250      | 250      |
| <b>COMPRESSORS</b>                                |     |         |          |          |          |          |
| N. COMPRESSORS/ N. CIRCUITS                       |     |         | 2 / 1    | 2 / 1    | 2 / 1    | 2 / 1    |
| Refrigerant charge                                | (7) | kg      | 8        | 9        | 9        | 10       |
| <b>NOISE LEVEL</b>                                |     |         |          |          |          |          |
| Unit sound power level - COOLING ONLY             | (4) | dB(A)   | 80       | 81       | 85       | 85       |
| Unit sound power level - HEATING ONLY             | (4) | dB(A)   | 79       | 79       | 83       | 83       |
| <b>SIZE</b>                                       |     |         |          |          |          |          |
| Length A                                          |     | mm      | 2960     | 2960     | 2960     | 2960     |
| Width B                                           | (6) | mm      | 1600     | 1600     | 1600     | 1600     |
| Height H                                          |     | mm      | 2396     | 2396     | 2396     | 2396     |
| Operating weight                                  | (5) | kg      | 1040     | 1070     | 1070     | 1090     |

### Notes:

- 1 Cooling: Outdoor 35°C 50% R.H. / Indoor 27°C 47% R.H. / Mix 30%.
- 2 Heating: Outdoor 7°C 87% R.H. / Indoor 20°C 50% R.H. / Mix 30%.
- 3 ESP for standard configuration (optional accessories not included/calculated).
- 4 Sound power on the basis of measurements made in compliance with ISO 3744.

For complete sound data consult Elca World.

- 5 The weight shown refers to the unit in the heat pump version, including any batteries and accessory filters. Any additional modules are not considered.

- 6 The dimension does not include hoods and the thickness of the pre-filter for fresh air if present.

- 7 The refrigerant charge is the result of a theoretical calculation and could be different from the actual amount of refrigerant which is charged in the unit and on the label"

The units highlighted in this publication contain HFC R410A [GWP<sub>100</sub> 2088] fluorinated greenhouse gases.



| Function HR-E                                |     |                   | 0102     | 0122     | 0132     | 0152     |
|----------------------------------------------|-----|-------------------|----------|----------|----------|----------|
| Power supply                                 |     | V/ph/Hz           | 400/3/50 | 400/3/50 | 400/3/50 | 400/3/50 |
| <b>COOLING WSM2-Y/WSM2-T-Y (GROSS VALUE)</b> |     |                   |          |          |          |          |
| Total cooling capacity                       | (1) | kW                | 44,9     | 50,5     | 57,7     | 63       |
| Total sensible capacity                      | (1) | kW                | 32,4     | 36,9     | 42,2     | 46,3     |
| Total absorbed power                         | (1) | kW                | 11,6     | 14,1     | 16,7     | 17,6     |
| EER (TOTAL)                                  | (1) |                   | 3,87     | 3,58     | 3,46     | 3,58     |
| <b>HEATING ONLY WSM2-Y (GROSS VALUE)</b>     |     |                   |          |          |          |          |
| Total heating capacity                       | (2) | kW                | 40,6     | 46       | 52,2     | 58,4     |
| TOTAL ABSORBED POWER                         | (2) | KW                | 10,8     | 12,2     | 13,8     | 14,5     |
| COP                                          | (2) |                   | 3,77     | 3,76     | 3,79     | 4,02     |
| <b>SUPPLY FAN</b>                            |     |                   |          |          |          |          |
| Quantity                                     |     |                   | 1        | 1        | 1        | 1        |
| AIR FLOW RATE                                |     | M <sup>3</sup> /H | 6300     | 7300     | 8400     | 9500     |
| Nominal AESP                                 | (3) | Pa                | 250      | 250      | 250      | 250      |
| <b>RETURN FAN</b>                            |     |                   |          |          |          |          |
| Quantity                                     |     |                   | 1        | 1        | 1        | 1        |
| AIR FLOW RATE                                |     | M <sup>3</sup> /H | 6300     | 7300     | 8400     | 9500     |
| Nominal AESP                                 | (3) | Pa                | 250      | 250      | 250      | 250      |
| <b>COMPRESSORS</b>                           |     |                   |          |          |          |          |
| N. COMPRESSORS/ N. CIRCUITS                  |     |                   | 2 / 1    | 2 / 1    | 2 / 1    | 2 / 1    |
| Refrigerant charge                           | (6) | kg                | 8        | 9        | 9        | 10       |
| <b>NOISE LEVEL</b>                           |     |                   |          |          |          |          |
| Unit sound power level - COOLING ONLY        | (4) | dB(A)             | 80       | 81       | 85       | 85       |
| Unit sound power level - HEATING ONLY        | (4) | dB(A)             | 79       | 79       | 83       | 83       |
| <b>SIZE</b>                                  |     |                   |          |          |          |          |
| Length A                                     |     | mm                | 3600     | 3600     | 3600     | 3600     |
| Width B                                      |     | mm                | 2400     | 2400     | 2400     | 2400     |
| Height H                                     |     | mm                | 1837     | 1837     | 1837     | 1837     |
| Operating weight                             | (5) | kg                | 1210     | 1240     | 1240     | 1250     |

**Notes:**

- 1 Cooling: Outdoor 35°C 50% R.H. / Indoor 27°C 47% R.H. / Mix 30%.
- 2 Heating: Outdoor 7°C 87% R.H. / Indoor 20°C 50% R.H. / Mix 30%.
- 3 ESP for standard configuration (optional accessories not included/calculated).
- 4 Sound power on the basis of measurements made in compliance with ISO 3744.  
For complete sound data consult Elca World.

- 5 The weight shown refers to the unit in the heat pump version, including any batteries and accessory filters.  
Any additional modules are not considered.
- 6 The refrigerant charge is the result of a theoretical calculation and could be different from the actual amount of refrigerant which is charged in the unit and on the label  
The units highlighted in this publication contain HFC R410A [GWP<sub>100</sub> 2088] fluorinated greenhouse gases.



## WSM2-Y

## 0264 - 0604

Air source reversible and cooling only  
rooftop unit  
(from 81,1 to 182 kW)



| WSM2-Y AR/MF                                                     |         |         | 0264        | 0304        | 0354        | 0404        | 0444        | 0484        | 0524        | 0604        |
|------------------------------------------------------------------|---------|---------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|
| Power supply                                                     |         | V/ph/Hz | 400/3/50    | 400/3/50    | 400/3/50    | 400/3/50    | 400/3/50    | 400/3/50    | 400/3/50    | 400/3/50    |
| <b>COOLING WSM2-Y/WSM2-T-Y(GROSS VALUE)</b>                      |         |         |             |             |             |             |             |             |             |             |
| Total cooling capacity                                           | (1)     | kW      | 81,1        | 88,7        | 104         | 122         | 133         | 144         | 159         | 182         |
| Total sensible capacity                                          | (1)     | kW      | 62,1        | 68,1        | 80,8        | 94,2        | 102         | 110         | 121         | 141         |
| Compressors power input                                          | (1)     | kW      | 22,6        | 25,2        | 29,6        | 34,7        | 34,8        | 35,5        | 39,4        | 49,6        |
| EER (total)                                                      | (1)(12) | kW/kW   | <b>2,9</b>  | <b>3,0</b>  | <b>2,9</b>  | <b>3,0</b>  | <b>3,1</b>  | <b>3,1</b>  | <b>3,1</b>  | <b>2,9</b>  |
| <b>COOLING WSM2-Y (EN14511 VALUE)</b>                            |         |         |             |             |             |             |             |             |             |             |
| Cooling capacity                                                 | (1)(3)  | kW      | 82,4        | 89,8        | 105         | 123         | 134         | 147         | 163         | 187         |
| EER                                                              | (1)(3)  | kW/kW   | <b>3,15</b> | <b>3,27</b> | <b>3,16</b> | <b>3,19</b> | <b>3,31</b> | <b>3,38</b> | <b>3,40</b> | <b>3,16</b> |
| Cooling energy class                                             |         |         | A           | A           | A           | A           | A           | A           | A           | A           |
| <b>HEATING WSM2-Y (GROSS VALUE)</b>                              |         |         |             |             |             |             |             |             |             |             |
| Total heating capacity                                           | (2)     | kW      | 83,4        | 93,0        | 105         | 124         | 133         | 143         | 163         | 189         |
| Compressors power input                                          | (2)     | kW      | <b>21,7</b> | <b>23,3</b> | <b>26,6</b> | <b>31,5</b> | <b>33,7</b> | <b>35,7</b> | <b>39,6</b> | <b>45,9</b> |
| COP (total)                                                      | (2)(12) | kW/kW   | 3,3         | 3,4         | 3,2         | 3,3         | 3,2         | 3,0         | 3,1         | 3,2         |
| <b>HEATING WSM2-Y (EN14511 VALUE)</b>                            |         |         |             |             |             |             |             |             |             |             |
| Total heating capacity                                           | (2)(3)  | kW      | 82,0        | 92,0        | 104         | 122         | 132         | 139         | 159         | 184         |
| COP                                                              | (2)(3)  | kW/kW   | <b>3,41</b> | <b>3,65</b> | <b>3,42</b> | <b>3,43</b> | <b>3,33</b> | <b>3,19</b> | <b>3,28</b> | <b>3,31</b> |
| Heating energy class                                             |         |         | A           | A           | A           | A           | B           | C           | B           | B           |
| <b>SEASONAL EFFICIENCY IN COOLING WSM2-Y (Reg. EU 2016/2281)</b> |         |         |             |             |             |             |             |             |             |             |
| <b>Ambient refrigeration</b>                                     |         |         |             |             |             |             |             |             |             |             |
| Prated,c                                                         | (7)     | kW      | 82,4        | 89,8        | 105         | 123         | 134         | 147         | 163         | 187         |
| SEER                                                             | (7)(8)  |         | 4,17        | 4,53        | 4,51        | 4,61        | 4,37        | 4,32        | 4,27        | 4,21        |
| Performance ηs                                                   | (7)(9)  | %       | 163,8       | 178,2       | 177,4       | 181,4       | 171,8       | 169,8       | 167,8       | 165,4       |
| <b>SEASONAL EFFICIENCY IN HEATING WSM2-Y (Reg. EU 2016/2281)</b> |         |         |             |             |             |             |             |             |             |             |
| <b>Ambient heating</b>                                           |         |         |             |             |             |             |             |             |             |             |
| PDesign                                                          | (7)     | kW      | 64,4        | 73,1        | 82,7        | 96,7        | 104         | 110         | 125         | 144         |
| SCOP                                                             | (7)(8)  |         | 3,42        | 3,62        | 3,59        | 3,66        | 3,68        | 3,54        | 3,58        | 3,55        |
| Performance ηs                                                   | (7)(10) | %       | 133,8       | 141,8       | 140,6       | 143,4       | 144,2       | 138,6       | 140,2       | 139,0       |
| <b>SUPPLY FANS (WSM2-Y)</b>                                      |         |         |             |             |             |             |             |             |             |             |
| Air flow rate                                                    |         | m³/h    | 13500       | 15500       | 18000       | 20500       | 22500       | 25000       | 28000       | 30500       |
| Nominal ESP                                                      | (4)     | Pa      | 200         | 125         | 125         | 150         | 150         | 300         | 350         | 350         |
| Total power input                                                | (12)    | kW      | 2,13        | 2,30        | 2,74        | 3,17        | 3,63        | 4,74        | 5,85        | 7,03        |
| <b>REFRIGERANT CIRCUIT</b>                                       |         |         |             |             |             |             |             |             |             |             |
| No. Compressors/No. Circuits                                     |         | N°      | 4/2         | 4/2         | 4/2         | 4/2         | 4/2         | 4/2         | 4/2         | 4/2         |
| Refrigerant charge                                               | (6)(11) | kg      | 17,6        | 24,0        | 24,6        | 32,0        | 37,5        | 38,0        | 44,0        | 50,0        |
| <b>NOISE LEVEL (WSM2-Y)</b>                                      |         |         |             |             |             |             |             |             |             |             |
| Sound power level in cooling mode                                | (5)     | dB(A)   | 83          | 83          | 84          | 84          | 90          | 91          | 92          | 92          |
| Sound Power on outlet side                                       | (5)     | dB(A)   | 79          | 74          | 76          | 78          | 79          | 90          | 93          | 96          |
| <b>SIZE</b>                                                      |         |         |             |             |             |             |             |             |             |             |
| <b>Function AR</b>                                               |         |         |             |             |             |             |             |             |             |             |
| Length                                                           | (6)     | mm      | 3665        | 3665        | 3665        | 3665        | 4465        | 4465        | 4465        | 4465        |
| Width                                                            | (6)     | mm      | 2250        | 2250        | 2250        | 2250        | 2250        | 2250        | 2250        | 2250        |
| Height                                                           | (6)     | mm      | 2410        | 2410        | 2410        | 2410        | 2410        | 2410        | 2410        | 2410        |
| Operating weight                                                 | (6)(13) | kg      | 1630        | 1740        | 1780        | 1840        | 2100        | 2170        | 2290        | 2320        |
| <b>Function MF</b>                                               |         |         |             |             |             |             |             |             |             |             |
| Length                                                           |         | mm      | 4800        | 4800        | 4800        | 4800        | 5600        | 5600        | 5600        | 5600        |
| Width                                                            |         | mm      | 2250        | 2250        | 2250        | 2250        | 2250        | 2250        | 2250        | 2250        |
| Height                                                           |         | mm      | 2410        | 2410        | 2410        | 2410        | 2410        | 2410        | 2410        | 2410        |
| Operating weight                                                 | (13)    | kg      | 2120        | 2230        | 2270        | 2330        | 2590        | 2660        | 2780        | 2810        |

**Notes:**

- 1 ► Cooling: Outdoor 35°C 50% R.H. / Indoor 27°C 47% R.H. / Mix 0%.
- 2 ► Heating: Outdoor 7°C 87% R.H. / Indoor 20°C 50% R.H. / Mix 0%.
- 3 ► Values in compliance with EN14511.
- 4 ► ESP for standard configuration (optional accessories not included/calculated).
- 5 ► Sound power on the basis of measurements made in compliance with ISO 9614.
- 6 ► Unit in AR configuration.
- 7 ► Parameter calculated according to [REGULATION (EU) N. 2016/2281].
- 8 ► Seasonal energy efficiency ratio.

- 9 ► Seasonal space cooling energy efficiency.
- 10 ► Seasonal energy efficiency of the heating environment in AVERAGE climatic conditions [REGULATION (EU) N. 2016/2281]
- 11 ► The gas charge is obtained from a theoretical calculation and may differ from the real one present in the unit and shown on the plate.
- 12 ► Available static pressure 250Pa (pressure drop resulting from any available accessories not included).
- 13 ► The weight shown refers to the unit in the heat pump version, including any batteries and accessory filters. Any additional modules are not considered.

**Certified data in EUROVENT\***

\* Eurovent certified data here reported refer to WSM2-Y reverse cycle unit. For WSM2-T-Y data please refer to the data book or Elca World. Check ongoing validity of certificate and data update on: [www.eurovent-certification.com](http://www.eurovent-certification.com)



| WSM2-Y AX                                         |     |         | 0264     | 0304     | 0354     | 0404     | 0444     | 0484     | 0524     | 0604     |
|---------------------------------------------------|-----|---------|----------|----------|----------|----------|----------|----------|----------|----------|
| Power supply                                      |     | V/ph/Hz | 400/3/50 | 400/3/50 | 400/3/50 | 400/3/50 | 400/3/50 | 400/3/50 | 400/3/50 | 400/3/50 |
| <b>COOLING ONLY WSM2-Y/WSM2-T-Y (GROSS VALUE)</b> |     |         |          |          |          |          |          |          |          |          |
| Total cooling capacity                            | (1) | kW      | 86,8     | 94,8     | 111      | 130      | 142      | 153      | 170      | 194      |
| Total sensible capacity                           | (1) | kW      | 62,7     | 68,7     | 81,5     | 94,9     | 103      | 110      | 122      | 142      |
| Total absorbed power                              | (1) | kW      | 30,9     | 32,5     | 38,6     | 44,4     | 49,0     | 52,5     | 57,8     | 69,6     |
| EER (total)                                       | (1) |         | 2,81     | 2,92     | 2,88     | 2,93     | 2,90     | 2,91     | 2,94     | 2,79     |
| <b>HEATING WSM2-Y (GROSS VALUE)</b>               |     |         |          |          |          |          |          |          |          |          |
| Total heating capacity                            | (2) | kW      | 84,3     | 94       | 107      | 125      | 135      | 145      | 166      | 191      |
| Total absorbed power                              | (2) | kW      | 26,5     | 28       | 33,2     | 38,1     | 44,7     | 49,2     | 54,3     | 61,7     |
| COP (total)                                       | (2) |         | 3,18     | 3,36     | 3,22     | 3,28     | 3,02     | 2,95     | 3,06     | 3,10     |
| <b>SUPPLY FAN</b>                                 |     |         |          |          |          |          |          |          |          |          |
| Quantity                                          |     |         | 1        | 2        | 2        | 2        | 2        | 2        | 2        | 2        |
| Air flow rate                                     |     | m³/h    | 13500    | 15500    | 18000    | 20500    | 22500    | 25000    | 28000    | 30500    |
| Nominal AESP                                      | (3) | Pa      | 250      | 250      | 250      | 250      | 250      | 250      | 250      | 250      |
| <b>EXHAUST FAN</b>                                |     |         |          |          |          |          |          |          |          |          |
| Quantity                                          |     |         | 1        | 1        | 1        | 1        | 2        | 2        | 2        | 2        |
| Air flow rate                                     |     | m³/h    | 4800     | 5550     | 6300     | 6750     | 8100     | 9000     | 9750     | 10500    |
| Nominal AESP                                      | (3) | Pa      | 150      | 150      | 150      | 150      | 150      | 150      | 150      | 150      |
| <b>REFRIGERANT CIRCUIT</b>                        |     |         |          |          |          |          |          |          |          |          |
| No. compressors / No. circuits                    |     |         | 2 / 2    | 2 / 2    | 2 / 2    | 2 / 2    | 2 / 2    | 2 / 2    | 2 / 2    | 2 / 2    |
| Refrigerant charge                                | (7) | kg      | 18       | 24       | 25       | 32       | 38       | 38       | 44       | 50       |
| <b>NOISE LEVEL</b>                                |     |         |          |          |          |          |          |          |          |          |
| Unit sound power level - COOLING ONLY             | (4) | dB(A)   | 86       | 86       | 86       | 86       | 93       | 93       | 93       | 94       |
| Unit sound power level - HEATING ONLY             | (4) | dB(A)   | 86       | 86       | 86       | 86       | 93       | 93       | 93       | 94       |
| <b>SIZE</b>                                       |     |         |          |          |          |          |          |          |          |          |
| Length                                            | (6) | mm      | 4800     | 4800     | 4800     | 4800     | 5600     | 5600     | 5600     | 5600     |
| Width                                             |     | mm      | 2250     | 2250     | 2250     | 2250     | 2250     | 2250     | 2250     | 2250     |
| Height                                            |     | mm      | 2410     | 2410     | 2410     | 2410     | 2410     | 2410     | 2410     | 2410     |
| Operating weight                                  | (5) | kg      | 2170     | 2280     | 2330     | 2380     | 2670     | 2740     | 2870     | 2900     |

| WSM2-Y CE                                         |     |         | 0264     | 0304     | 0354     | 0404     | 0444     | 0484     | 0524     | 0604     |
|---------------------------------------------------|-----|---------|----------|----------|----------|----------|----------|----------|----------|----------|
| Power supply                                      |     | V/ph/Hz | 400/3/50 | 400/3/50 | 400/3/50 | 400/3/50 | 400/3/50 | 400/3/50 | 400/3/50 | 400/3/50 |
| <b>COOLING ONLY WSM2-Y/WSM2-T-Y (GROSS VALUE)</b> |     |         |          |          |          |          |          |          |          |          |
| Total cooling capacity                            | (1) | kW      | 86,8     | 94,8     | 111      | 130      | 142      | 153      | 170      | 194      |
| Total sensible capacity                           | (1) | kW      | 62,7     | 68,7     | 81,5     | 94,9     | 103      | 110      | 122      | 142      |
| Total absorbed power                              | (1) | kW      | 30,2     | 32,4     | 38,2     | 44,4     | 43,8     | 47,3     | 52,6     | 64,4     |
| EER (total)                                       | (1) |         | 2,87     | 2,93     | 2,91     | 2,93     | 3,24     | 3,23     | 3,23     | 3,01     |
| <b>HEATING WSM2-Y (GROSS VALUE)</b>               |     |         |          |          |          |          |          |          |          |          |
| Total heating capacity                            | (2) | kW      | 84,3     | 94       | 107      | 125      | 135      | 145      | 166      | 191      |
| Total absorbed power                              | (2) | kW      | 25,8     | 27,9     | 32,7     | 38       | 39,5     | 44       | 49,1     | 56,5     |
| COP (total)                                       | (2) |         | 3,27     | 3,37     | 3,27     | 3,29     | 3,42     | 3,3      | 3,38     | 3,38     |
| <b>SUPPLY FAN</b>                                 |     |         |          |          |          |          |          |          |          |          |
| Quantity                                          |     |         | 1        | 2        | 2        | 2        | 2        | 2        | 2        | 2        |
| Air flow rate                                     |     | m³/h    | 13500    | 15500    | 18000    | 20500    | 22500    | 25000    | 28000    | 30500    |
| Nominal AESP                                      | (3) | Pa      | 250      | 250      | 250      | 250      | 250      | 250      | 250      | 250      |
| <b>RETURN FAN</b>                                 |     |         |          |          |          |          |          |          |          |          |
| Quantity                                          |     |         | 1        | 1        | 2        | 2        | 2        | 2        | 2        | 2        |
| Air flow rate                                     |     | m³/h    | 13500    | 15500    | 18000    | 20500    | 22500    | 25000    | 28000    | 30500    |
| Nominal AESP                                      | (3) | Pa      | 250      | 250      | 250      | 250      | 250      | 250      | 250      | 250      |
| <b>REFRIGERANT CIRCUIT</b>                        |     |         |          |          |          |          |          |          |          |          |
| No. compressors / No. circuits                    |     |         | 2 / 2    | 2 / 2    | 2 / 2    | 2 / 2    | 2 / 2    | 2 / 2    | 2 / 2    | 2 / 2    |
| Refrigerant charge                                | (8) | kg      | 18       | 24       | 25       | 32       | 38       | 38       | 44       | 50       |
| <b>NOISE LEVEL</b>                                |     |         |          |          |          |          |          |          |          |          |
| Unit sound power level - COOLING ONLY             | (4) | dB(A)   | 83       | 83       | 84       | 84       | 90       | 91       | 92       | 92       |
| Unit sound power level - HEATING ONLY             | (4) | dB(A)   | 83       | 83       | 84       | 84       | 90       | 91       | 92       | 92       |
| <b>SIZE</b>                                       |     |         |          |          |          |          |          |          |          |          |
| Length                                            |     | mm      | 6100     | 6100     | 6100     | 6100     | 6900     | 6900     | 6900     | 6900     |
| Width                                             | (8) | mm      | 2250     | 2250     | 2250     | 2250     | 2250     | 2250     | 2250     | 2250     |
| Height                                            |     | mm      | 2410     | 2410     | 2410     | 2410     | 2410     | 2410     | 2410     | 2410     |
| Operating weight                                  | (5) | kg      | 2510     | 2620     | 2670     | 2720     | 3080     | 3150     | 3270     | 3300     |

**Notes:**

- 1 ▶ Cooling: Outdoor 35°C 50% R.H. / Indoor 27°C 47% R.H. / Mix 30%.
- 2 ▶ Heating: Outdoor 7°C 87% R.H. / Indoor 20°C 50% R.H. / Mix 30%.
- 3 ▶ ESP for standard configuration (optional accessories not included/calculated).
- 4 ▶ Sound power on the basis of measurements made in compliance with ISO 9614. For complete sound data consult Elca World.
- 5 ▶ The weight shown refers to the unit in the heat pump version, including any batteries and accessory

filters. Any additional modules are not considered.

- 6 ▶ The dimension does not include hood and expulsion fans.
- 7 ▶ The refrigerant charge is the result of a theoretical calculation and could be different from the actual amount of refrigerant which is charged in the unit and on the label.
- 8 ▶ The dimension does not include hoods and the thickness of the pre-filter for fresh air if present.

The units highlighted in this publication contain HFC R410A (GWP<sub>100</sub> 2088) fluorinated greenhouse gases.

## WSM2-Y

## 0264 - 0604

Air source reversible and cooling only  
rooftop unit  
(from 81,1 to 182 kW)



| WSM2-Y HR-B                                       |     |         | 0264     | 0304     | 0354     | 0404     | 0444     | 0484     | 0524     | 0604     |
|---------------------------------------------------|-----|---------|----------|----------|----------|----------|----------|----------|----------|----------|
| Power supply                                      |     | V/ph/Hz | 400/3/50 | 400/3/50 | 400/3/50 | 400/3/50 | 400/3/50 | 400/3/50 | 400/3/50 | 400/3/50 |
| <b>COOLING ONLY WSM2-Y/WSM2-T-Y (GROSS VALUE)</b> |     |         |          |          |          |          |          |          |          |          |
| Total cooling capacity                            | (1) | kW      | 94,3     | 103      | 120      | 141      | 154      | 167      | 184      | 211      |
| Total sensible capacity                           | (1) | kW      | 65,8     | 72,0     | 85,5     | 99,6     | 108      | 116      | 127      | 149      |
| Total absorbed power                              | (1) | kW      | 30,3     | 32,4     | 38,3     | 44,5     | 43,8     | 47,3     | 52,6     | 64,4     |
| EER (total)                                       | (1) |         | 3,11     | 3,18     | 3,13     | 3,17     | 3,52     | 3,53     | 3,5      | 3,28     |
| <b>HEATING ONLY WSM2-Y (GROSS VALUE)</b>          |     |         |          |          |          |          |          |          |          |          |
| Total heating capacity                            | (2) | kW      | 90,9     | 101      | 115      | 135      | 146      | 156      | 179      | 206      |
| Total absorbed power                              | (2) | kW      | 26,5     | 28,7     | 33,6     | 39,1     | 40,5     | 45,1     | 50,3     | 57,9     |
| COP (total)                                       | (2) |         | 3,42     | 3,54     | 3,41     | 3,45     | 3,6      | 3,46     | 3,55     | 3,56     |
| <b>SUPPLY FAN</b>                                 |     |         |          |          |          |          |          |          |          |          |
| Quantity                                          |     |         | 1        | 2        | 2        | 2        | 2        | 2        | 2        | 2        |
| Air flow rate                                     |     | m³/h    | 13500    | 15500    | 18000    | 20500    | 22500    | 25000    | 28000    | 30500    |
| Nominal AESP                                      | (3) | Pa      | 250      | 250      | 250      | 250      | 250      | 250      | 250      | 250      |
| <b>RETURN FAN</b>                                 |     |         |          |          |          |          |          |          |          |          |
| Quantity                                          |     |         | 1        | 1        | 2        | 2        | 2        | 2        | 2        | 2        |
| Air flow rate                                     |     | m³/h    | 13500    | 15500    | 18000    | 20500    | 22500    | 25000    | 28000    | 30500    |
| Nominal AESP                                      | (3) | Pa      | 250      | 250      | 250      | 250      | 250      | 250      | 250      | 250      |
| <b>REFRIGERANT CIRCUIT</b>                        |     |         |          |          |          |          |          |          |          |          |
| No. compressors / No. circuits                    |     |         | 2 / 2    | 2 / 2    | 2 / 2    | 2 / 2    | 2 / 2    | 2 / 2    | 2 / 2    | 2 / 2    |
| Refrigerant charge                                | (8) | kg      | 34       | 42       | 50       | 62       | 75       | 80       | 88       | 104      |
| <b>NOISE LEVEL</b>                                |     |         |          |          |          |          |          |          |          |          |
| Unit sound power level - COOLING ONLY             | (4) | dB(A)   | 83       | 84       | 86       | 87       | 90       | 91       | 92       | 92       |
| Unit sound power level - HEATING ONLY             | (4) | dB(A)   | 83       | 84       | 86       | 87       | 90       | 91       | 92       | 92       |
| <b>SIZE</b>                                       |     |         |          |          |          |          |          |          |          |          |
| Length                                            |     | mm      | 6100     | 6100     | 6100     | 6100     | 6900     | 6900     | 6900     | 6900     |
| Width                                             | (7) | mm      | 2250     | 2250     | 2250     | 2250     | 2250     | 2250     | 2250     | 2250     |
| Height                                            |     | mm      | 2410     | 2410     | 2410     | 2410     | 2410     | 2410     | 2410     | 2410     |
| Operating weight                                  | (5) | kg      | 2560     | 2670     | 2710     | 2760     | 3130     | 3200     | 3330     | 3360     |

| WSM2-Y HR-P LOW FLOW                              |     |         | 0264     | 0304     | 0354     | 0404     | 0444     | 0484     | 0524     | 0604     |
|---------------------------------------------------|-----|---------|----------|----------|----------|----------|----------|----------|----------|----------|
| Power supply                                      |     | V/ph/Hz | 400/3/50 | 400/3/50 | 400/3/50 | 400/3/50 | 400/3/50 | 400/3/50 | 400/3/50 | 400/3/50 |
| <b>COOLING ONLY WSM2-Y/WSM2-T-Y (GROSS VALUE)</b> |     |         |          |          |          |          |          |          |          |          |
| Total cooling capacity                            | (1) | kW      | 93,8     | 100      | 117      | 137      | 149      | 162      | 179      | 204      |
| Total sensible capacity                           | (1) | kW      | 65,4     | 71,0     | 84,0     | 97,7     | 106      | 114      | 126      | 146      |
| Total absorbed power                              | (1) | kW      | 30,3     | 32,7     | 38,9     | 45,2     | 47,7     | 51,9     | 58,3     | 72,3     |
| EER (total)                                       | (1) |         | 3,1      | 3,06     | 3,01     | 3,03     | 3,12     | 3,12     | 3,07     | 2,82     |
| <b>HEATING ONLY WSM2-Y (GROSS VALUE)</b>          |     |         |          |          |          |          |          |          |          |          |
| Total heating capacity                            | (2) | kW      | 93,4     | 104      | 118      | 138      | 149      | 160      | 183      | 210      |
| Total absorbed power                              | (2) | kW      | 27       | 29,2     | 34,6     | 40,2     | 44,8     | 50,1     | 56,4     | 66       |
| COP (total)                                       | (2) |         | 3,46     | 3,57     | 3,42     | 3,44     | 3,33     | 3,2      | 3,24     | 3,17     |
| <b>SUPPLY FAN</b>                                 |     |         |          |          |          |          |          |          |          |          |
| Quantity                                          |     |         | 1        | 2        | 2        | 2        | 2        | 2        | 2        | 2        |
| Air flow rate                                     |     | m³/h    | 13500    | 15500    | 18000    | 20500    | 22500    | 25000    | 28000    | 30500    |
| Nominal AESP                                      | (3) | Pa      | 250      | 250      | 250      | 250      | 250      | 250      | 250      | 250      |
| <b>RETURN FAN</b>                                 |     |         |          |          |          |          |          |          |          |          |
| Quantity                                          |     |         | 1        | 1        | 2        | 2        | 2        | 2        | 2        | 2        |
| Air flow rate                                     |     | m³/h    | 13500    | 15500    | 18000    | 20500    | 22500    | 25000    | 28000    | 30500    |
| Nominal AESP                                      | (3) | Pa      | 250      | 250      | 250      | 250      | 250      | 250      | 250      | 250      |
| <b>REFRIGERANT CIRCUIT</b>                        |     |         |          |          |          |          |          |          |          |          |
| No. compressors / No. circuits                    |     |         | 2 / 2    | 2 / 2    | 2 / 2    | 2 / 2    | 2 / 2    | 2 / 2    | 2 / 2    | 2 / 2    |
| Refrigerant charge                                | (8) | kg      | 17,6     | 24       | 24,6     | 32       | 37,5     | 38       | 44       | 50       |
| <b>NOISE LEVEL</b>                                |     |         |          |          |          |          |          |          |          |          |
| Unit sound power level - COOLING ONLY             | (4) | dB(A)   | 83       | 84       | 86       | 87       | 90       | 91       | 92       | 92       |
| Unit sound power level - HEATING ONLY             | (4) | dB(A)   | 83       | 84       | 86       | 87       | 90       | 91       | 92       | 92       |
| <b>SIZE</b>                                       |     |         |          |          |          |          |          |          |          |          |
| Length                                            |     | mm      | 6100     | 6100     | 6100     | 6100     | 6900     | 6900     | 6900     | 6900     |
| Width                                             | (7) | mm      | 2250     | 2250     | 2250     | 2250     | 2250     | 2250     | 2250     | 2250     |
| Height                                            |     | mm      | 2410     | 2410     | 2410     | 2410     | 2410     | 2410     | 2410     | 2410     |
| Operating weight                                  | (5) | kg      | 2700     | 2810     | 2860     | 2910     | 3330     | 3400     | 3520     | 3550     |

**Notes:**

- 1 ▶ Cooling: Outdoor 35°C 50% R.H. / Indoor 27°C 47% R.H. / Mix 30%.
- 2 ▶ Heating: Outdoor 7°C 87% R.H. / Indoor 20°C 50% R.H. / Mix 30%.
- 3 ▶ ESP for standard configuration (optional accessories not included/calculated).
- 4 ▶ Sound power on the basis of measurements made in compliance with ISO 9614. For complete sound data consult Elca World.
- 5 ▶ The weight shown refers to the unit in the heat pump version, including any batteries and accessory

filters. Any additional modules are not considered.

- 7 ▶ The dimension does not include hoods and the thickness of the pre-filter for fresh air if present.
- 8 ▶ The refrigerant charge is the result of a theoretical calculation and could be different from the actual amount of refrigerant which is charged in the unit and on the label

The units highlighted in this publication contain HFC R410A [GWP<sub>100</sub> 2088] fluorinated greenhouse gases.



| WSM2-Y HR-P HIGH FLOW                             |     |         | 0264     | 0304     | 0354     | 0404     | 0444     | 0484     | 0524     | 0604     |
|---------------------------------------------------|-----|---------|----------|----------|----------|----------|----------|----------|----------|----------|
| Power supply                                      |     | V/ph/Hz | 400/3/50 | 400/3/50 | 400/3/50 | 400/3/50 | 400/3/50 | 400/3/50 | 400/3/50 | 400/3/50 |
| <b>COOLING ONLY WSM2-Y/WSM2-T-Y (GROSS VALUE)</b> |     |         |          |          |          |          |          |          |          |          |
| Total cooling capacity                            | (1) | kW      | 92,2     | 101      | 118      | 138      | 150      | 167      | 184      | 205      |
| Total sensible capacity                           | (1) | kW      | 64,8     | 71,2     | 84,2     | 97,9     | 106      | 116      | 128      | 146      |
| Total absorbed power                              | (1) | kW      | 30,2     | 32,3     | 38,4     | 44,5     | 46,8     | 50,9     | 56,9     | 69,6     |
| EER (total)                                       | (1) |         | 3,05     | 3,13     | 3,07     | 3,1      | 3,21     | 3,28     | 3,23     | 2,95     |
| <b>HEATING ONLY WSM2-Y (GROSS VALUE)</b>          |     |         |          |          |          |          |          |          |          |          |
| Total heating capacity                            | (2) | kW      | 94,1     | 105      | 119      | 139      | 151      | 162      | 184      | 211      |
| Total absorbed power                              | (2) | kW      | 26,9     | 29       | 34,1     | 39,6     | 44,1     | 49,3     | 55,3     | 63,5     |
| COP                                               | (2) |         | 3,5      | 3,63     | 3,49     | 3,52     | 3,42     | 3,28     | 3,33     | 3,33     |
| <b>SUPPLY FAN</b>                                 |     |         |          |          |          |          |          |          |          |          |
| Quantity                                          |     |         | 1        | 2        | 2        | 2        | 2        | 2        | 2        | 2        |
| Air flow rate                                     |     | m³/h    | 13500    | 15500    | 18000    | 20500    | 22500    | 25000    | 28000    | 30500    |
| Nominal AESP                                      | (3) | Pa      | 250      | 250      | 250      | 250      | 250      | 250      | 250      | 250      |
| <b>RETURN FAN</b>                                 |     |         |          |          |          |          |          |          |          |          |
| Quantity                                          |     |         | 1        | 1        | 2        | 2        | 2        | 2        | 2        | 2        |
| Air flow rate                                     |     | m³/h    | 13500    | 15500    | 18000    | 20500    | 22500    | 25000    | 28000    | 30500    |
| Nominal AESP                                      | (3) | Pa      | 250      | 250      | 250      | 250      | 250      | 250      | 250      | 250      |
| <b>REFRIGERANT CIRCUIT</b>                        |     |         |          |          |          |          |          |          |          |          |
| No. compressors / No. circuits                    |     |         | 2 / 2    | 2 / 2    | 2 / 2    | 2 / 2    | 2 / 2    | 2 / 2    | 2 / 2    | 2 / 2    |
| Refrigerant charge                                | (8) | kg      | 17,6     | 24       | 24,6     | 32       | 37,5     | 38       | 44       | 50       |
| <b>NOISE LEVEL</b>                                |     |         |          |          |          |          |          |          |          |          |
| Unit sound power level - COOLING ONLY             | (4) | dB(A)   | 83       | 84       | 86       | 87       | 90       | 91       | 92       | 92       |
| Unit sound power level - HEATING ONLY             | (4) | dB(A)   | 83       | 84       | 86       | 87       | 90       | 91       | 92       | 92       |
| <b>SIZE</b>                                       |     |         |          |          |          |          |          |          |          |          |
| Length                                            |     | mm      | 6100     | 6100     | 6100     | 6100     | 6900     | 6900     | 6900     | 6900     |
| Width                                             | (7) | mm      | 2250     | 2250     | 2250     | 2250     | 2250     | 2250     | 2250     | 2250     |
| Height                                            |     | mm      | 2410     | 2410     | 2410     | 2410     | 2410     | 2410     | 2410     | 2410     |
| Operating weight                                  | (5) | kg      | 2700     | 2810     | 2860     | 2910     | 3330     | 3400     | 3520     | 3550     |

| WSM2-Y HR-E                                       |     |         | 0264     | 0304     | 0354     | 0404     | 0444     | 0484     | 0524     | 0604     |
|---------------------------------------------------|-----|---------|----------|----------|----------|----------|----------|----------|----------|----------|
| Power supply                                      |     | V/ph/Hz | 400/3/50 | 400/3/50 | 400/3/50 | 400/3/50 | 400/3/50 | 400/3/50 | 400/3/50 | 400/3/50 |
| <b>COOLING ONLY WSM2-Y/WSM2-T-Y (GROSS VALUE)</b> |     |         |          |          |          |          |          |          |          |          |
| Total cooling capacity                            | (1) | kW      | 109      | 120      | 140      | 162      | 178      | 194      | 214      | 241      |
| Total sensible capacity                           | (1) | kW      | 70,6     | 77,7     | 91,6     | 106,0    | 116      | 125      | 137      | 159      |
| Total absorbed power                              | (1) | kW      | 30,1     | 32,3     | 38,5     | 44,6     | 46,7     | 50,8     | 56,8     | 69,2     |
| EER (total)                                       | (1) |         | 3,62     | 3,72     | 3,64     | 3,63     | 3,81     | 3,82     | 3,77     | 3,48     |
| <b>HEATING ONLY WSM2-Y (GROSS VALUE)</b>          |     |         |          |          |          |          |          |          |          |          |
| Total heating capacity                            | (2) | kW      | 102      | 114      | 129      | 150      | 163      | 176      | 200      | 228      |
| Total absorbed power                              | (2) | kW      | 27,4     | 29,5     | 34,9     | 40,5     | 44,8     | 50       | 56       | 64,2     |
| COP                                               | (2) |         | 3,71     | 3,85     | 3,7      | 3,71     | 3,65     | 3,51     | 3,56     | 3,54     |
| <b>SUPPLY FAN</b>                                 |     |         |          |          |          |          |          |          |          |          |
| Quantity                                          |     |         | 1        | 2        | 2        | 2        | 2        | 2        | 2        | 2        |
| Air flow rate                                     |     | m³/h    | 13500    | 15500    | 18000    | 20500    | 22500    | 25000    | 28000    | 30500    |
| Nominal AESP                                      | (3) | Pa      | 250      | 250      | 250      | 250      | 250      | 250      | 250      | 250      |
| <b>RETURN FAN</b>                                 |     |         |          |          |          |          |          |          |          |          |
| Quantity                                          |     |         | 1        | 1        | 2        | 2        | 2        | 2        | 2        | 2        |
| Air flow rate                                     |     | m³/h    | 13500    | 15500    | 18000    | 20500    | 22500    | 25000    | 28000    | 30500    |
| Nominal AESP                                      | (3) | Pa      | 250      | 250      | 250      | 250      | 250      | 250      | 250      | 250      |
| <b>REFRIGERANT CIRCUIT</b>                        |     |         |          |          |          |          |          |          |          |          |
| No. compressors / No. circuits                    |     |         | 2 / 2    | 2 / 2    | 2 / 2    | 2 / 2    | 2 / 2    | 2 / 2    | 2 / 2    | 2 / 2    |
| Refrigerant charge                                | (8) | kg      | 17,6     | 24       | 24,6     | 32       | 37,5     | 38       | 44       | 50       |
| <b>NOISE LEVEL</b>                                |     |         |          |          |          |          |          |          |          |          |
| Unit sound power level - COOLING ONLY             | (4) | dB(A)   | 83       | 84       | 86       | 87       | 90       | 91       | 92       | 92       |
| Unit sound power level - HEATING ONLY             | (4) | dB(A)   | 83       | 84       | 86       | 87       | 90       | 91       | 92       | 92       |
| <b>SIZE</b>                                       |     |         |          |          |          |          |          |          |          |          |
| Length                                            |     | mm      | 6100     | 6100     | 6100     | 6100     | 6900     | 6900     | 6900     | 6900     |
| Width                                             | (7) | mm      | 2250     | 2250     | 2250     | 2250     | 2250     | 2250     | 2250     | 2250     |
| Height                                            |     | mm      | 2410     | 2410     | 2410     | 2410     | 2410     | 2410     | 2410     | 2410     |
| Operating weight                                  | (5) | kg      | 2710     | 2820     | 2860     | 2910     | 3320     | 3390     | 3520     | 3550     |

**Notes:**

- 1 ▶ Cooling: Outdoor 35°C 50% R.H. / Indoor 27°C 47% R.H. / Mix 30%.
- 2 ▶ Heating: Outdoor 7°C 87% R.H. / Indoor 20°C 50% R.H. / Mix 30%.
- 3 ▶ ESP for standard configuration (optional accessories not included/calculated).
- 4 ▶ Sound power on the basis of measurements made in compliance with ISO 9614. For complete sound data consult Elca World.
- 5 ▶ The weight shown refers to the unit in the heat pump version, including any batteries and accessory

filters. Any additional modules are not considered.

- 7 ▶ The dimension does not include hoods and the thickness of the pre-filter for fresh air if present.
- 8 ▶ The refrigerant charge is the result of a theoretical calculation and could be different from the actual amount of refrigerant which is charged in the unit and on the label

The units highlighted in this publication contain HFC R410A [GWP<sub>100</sub> 2088] fluorinated greenhouse gases.

# “BY FAR THE BEST PROOF IS EXPERIENCE”

**Sir Francis Bacon**

British philosopher (1561 - 1626)

## DECATHLON LOGISTICS BRANDIZZO

2015-2016 BRANDIZZO, TURIN (ITALY)

### Application:

Mixed-Use Development

### Airflow:

339700 m<sup>3</sup>/h

### Installed machines:

7x WSM2-Y/CE 402,

8x WSM2-Y/HR-B



### PROJECT

The new logistics hub located in Brandizzo has a gross surface area of roughly 23,000 m<sup>2</sup> serves 25 stores in northern Italy. A new layout has been studied here and will be used in all new Decathlon warehouses worldwide. Two automated mezzanine floors have been inserted, allowing the process to be quicker, more sustainable and more profitable.

### CHALLENGE

As the building is undergoing a LEED certification, great attention has been paid to sustainability. Green choices have been made both in terms of a passive structure and mechanical plants.

### SOLUTION

The HVAC system is based on 15 WSM2-Y high efficiency reversible air cooled roof top units by Climaveneta. 10 of them are dedicated to the open spaces, 4 to the automated mezzanine floors and the last one to the laboratories, for a total air flow of about 340.000 m<sup>3</sup>/h.

Going into detail, they have installed 7 WSM-Y/CE 402 with free-cooling and 8 WSM-Y/HR-B with thermodynamic heat recovery to maximize the energy efficiency under all weather conditions.



Every project is characterised by different needs and system specifications for various climates. All these projects share high energy efficiency, maximum integration, and total reliability resulting from the Climaveneta brand experience.

## VESTAS PLANTS

2015 TARANTO (ITALY)

**Application:**  
Industrial technology

**Airflow:**  
532000 m<sup>3</sup>/h

**Installed machines:**  
10x WSM-Y / HR 1004 rooftop units



### PROJECT

Vestas is the only global energy company dedicated exclusively to wind energy. At Vestas, they believe energy to be important for creating a better quality of life. A stable energy supply is an essential part of the infrastructure for a developed society. Energy is central to nearly every major challenge and opportunity the world faces today.

### CHALLENGE

When upgrading their air conditioning systems for both plants, they focused on comfort for their employees and the best environmental conditions for the process.

### SOLUTION

They therefore installed 10 Climaveneta Rooftop units by for a total air flow of 532,000 m<sup>3</sup>/h. Specifically they selected 4 WSM-Y / HR 1004, 4 WSM-Y / HR 0904 and 2 WSM-Y / HR 1204. These units provide complete air handling and ventilation of large spaces, at Vestas they were selected in HR version which means with heat recovery, to get higher energy efficiency.





for a greener tomorrow

Eco Changes is the Mitsubishi Electric Group's environmental statement, and expresses the Group's stance on environmental management. Through a wide range of businesses, we are helping contribute to the realization of a sustainable society.



## **mitsubishi electric hydronics & it cooling systems S.p.A.**

Head Office: Via Caduti di Cefalonia 1 - 36061 Bassano del Grappa (VI) - Italy

Tel (+39) 0424 509 500 - Fax (+39) 0424 509 509

[www.climaveneta.com](http://www.climaveneta.com)

[www.melcohit.com](http://www.melcohit.com)